


KNIPEX Quality – Made in Germany



# KNIPEX Electrical Range

Further products on  
[www.knipex.com](http://www.knipex.com)

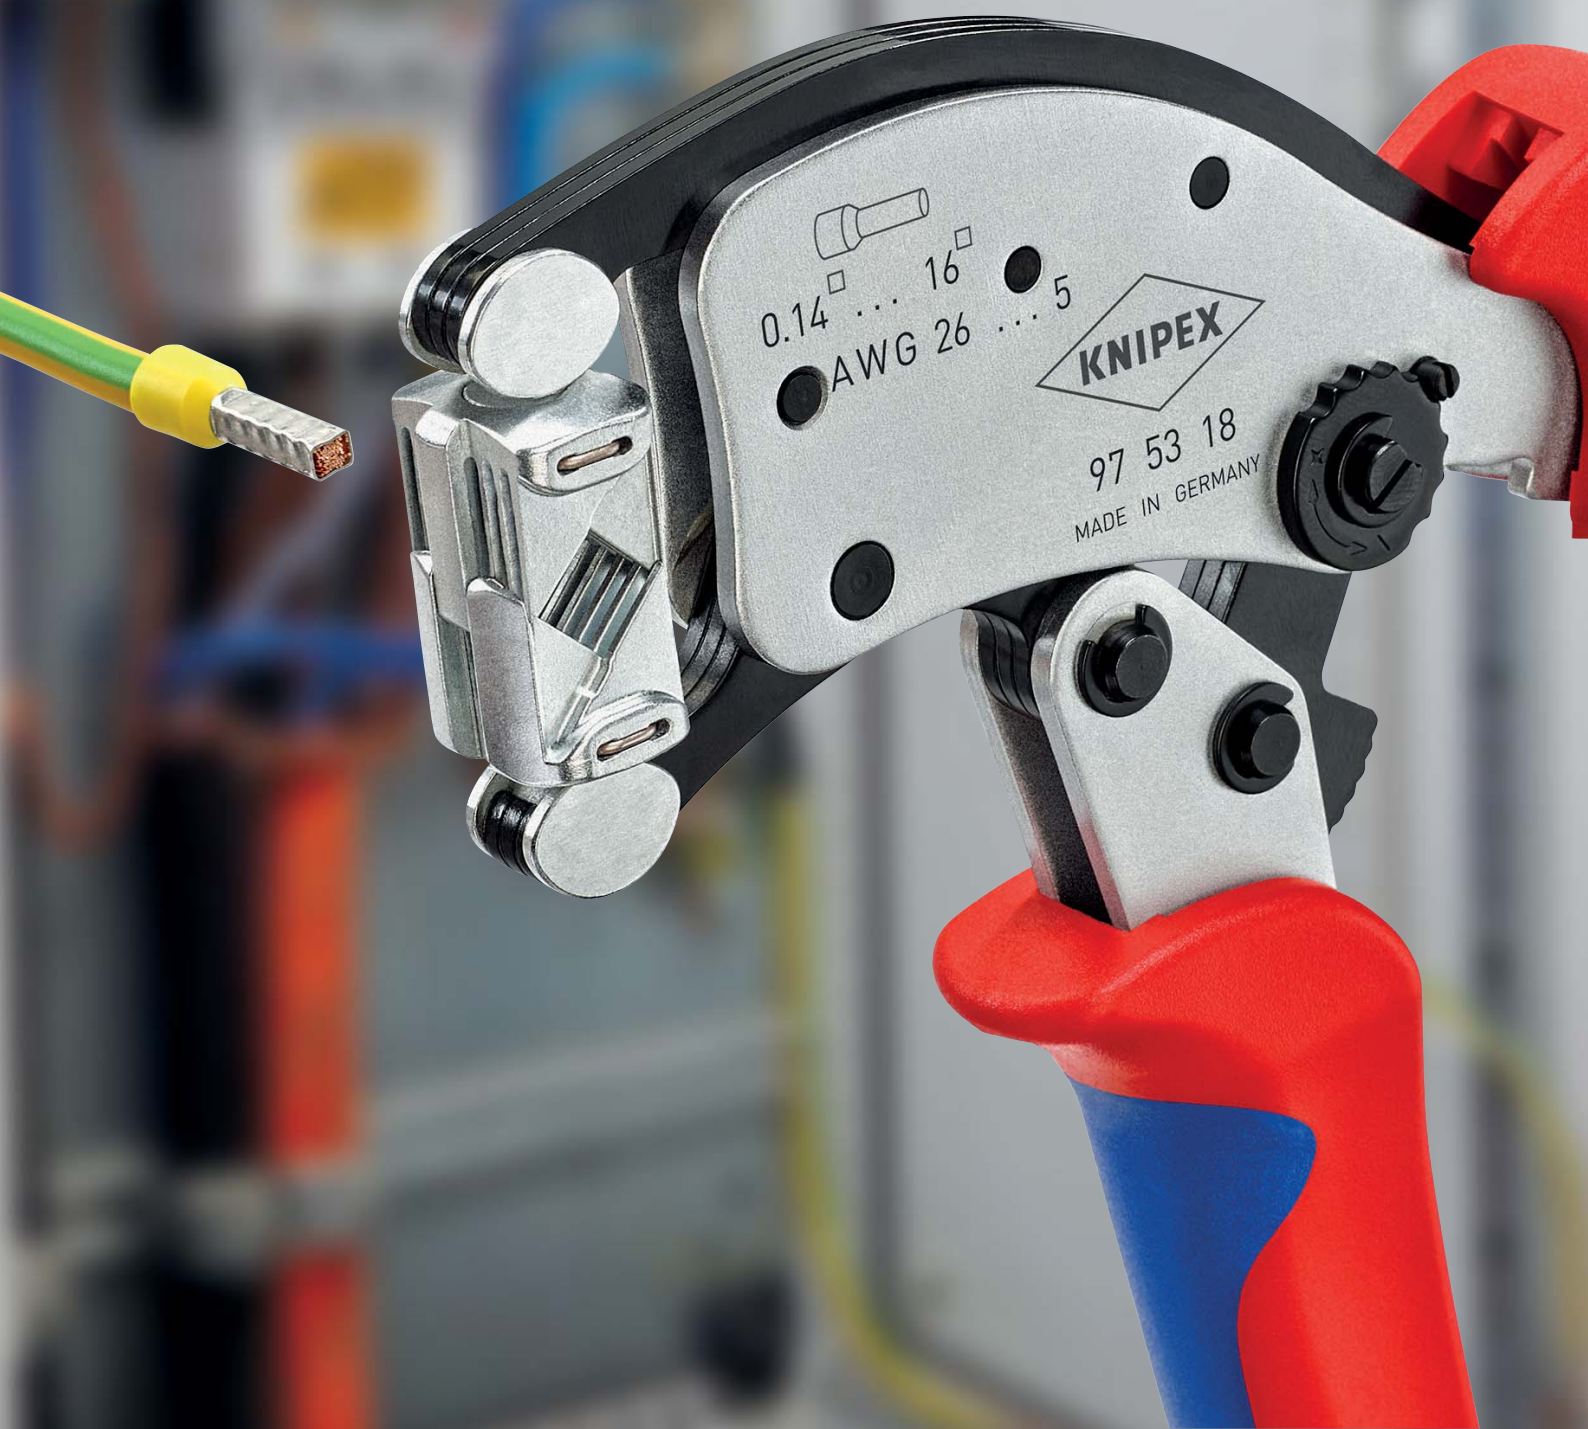



## Pliers for the electrical sector

Professional users in the electrical industry will find that KNIPEX offers them a comprehensive range of essential standard and special pliers for installation, assembly, repair and maintenance activities.

Diagonal cutters, cable shears, wire strippers and stripping tools, crimping pliers – the list is long.

When you're working on cables, connectors, electrical and electronic systems, you'll find that KNIPEX has the right tool for almost any task that arises.

For over 135 years KNIPEX pliers have been a flagship for products "Made in Germany" - with their own drop forge, mechanical production, hardening, annealing and electroplating shops, all monitored by efficient quality controls at every single step.

Applying engineering skills and a great deal of experience, KNIPEX develops pliers in dialogue with the users, in line with the changing requirements of technologies, markets and industries. Thus, the KNIPEX name has become synonymous with functionality, user convenience and longevity.

This catalogue contains a selection of our extensive range of pliers, which we have put together especially for the electrical sector.

Discover also our new products for electricians:

- > The KNIPEX Twistor16 self-adjusting crimping pliers with its 360° rotatable crimping die can compress end sleeves up to 16 mm<sup>2</sup> from almost any working position.
- > The KNIPEX TwistCut allows you to cut corrugated pipes between 16 and 32 mm in diameter quickly and with no risk for cables and fingers. The practical 2-in-1 tool also offers stripping devices for wires between 0.2 and 4.0 mm<sup>2</sup>.
- > The award-winning KNIPEX ErgoStrip® universal dismantling tool is also perfect for left-handed use: The KNIPEX ErgoStrip® L means that left-handed users can now also strip and dismantle all kinds of household electrical cables quickly and effectively.

More information about our new products can be found in this catalogue.


## SYMBOLS

	flat jaws		with lead catcher		electrostatic discharging, dissipative		soft wire
	half-round jaws		angle		electronics		medium hard wire
	round jaws		centre cutter		VDE-tested, also in compliance with GPSG		hard wire
	flat and pointed jaws		cutting edges with bevel		insulated according to IEC 60900, usable up to 1000 V AC / 1500 V DC		piano wire
	box-joint		cutting edges with small bevel		conforms to a European directive		Cu- + Al-multi-conductor cable, solid and multi-stranded
	bolted joint		cutting edges with very small bevel		mechanically tested in accordance with the equipment and product safety act		wire rope
	smooth gripping surfaces		cutting edges without bevel		WEEE marking (Waste Electrical and Electronic Equipment Directive)		iron
	knurled gripping surfaces		for flush cut of soft materials		weight		ribbon cable
	cross-hatched, knurled gripping surfaces				length		steel wire armoured cable (SWA)
	with opening spring						Further details and explanations can be found on the final pages.
			New Article				

# Insulated tools are a matter of trust

Professionals trust their tools. This trust is vital when working on electrical installations. An electrician holding pliers is also holding his life in his hands. Our insulated tools therefore not only meet statutory requirements, but also offer the greatest possible safety, reliability and performance.

## Regulated by standards

Only trained professionals are allowed to work on live installations. Such work is subject to strict occupational health and safety standards such as the German DIN VDE 0105 and the international EN 50110 and IEC 60364. In each case they must deploy special tools that have been specifically manufactured and tested for this work. Which requirements have to be met by tools used in live work is determined by DIN EN / IEC 60900. KNIPEX tools which bear the special mark  1000V are approved for work up to 1000 V AC.

## Individual checks guaranteed

Every insulated tool undergoes, one by one, a dielectric strength test at 10,000 V AC before we sell it. This guarantees a reassuring safety buffer. Other procedures check the reliability of the insulation towards heat, cold, tensile and impact force. In addition to the KNIPEX quality assurance system certified to ISO 9001, external institutes and test centres such as the VDE guarantee that all VDE criteria have been satisfied. We go through this effort to safeguard the users. They trust their well-being with our pliers, day in and day out. In return we want to give them the best possible safety at all times. We stand by this responsibility on the insulation of KNIPEX tools.

## Strong beneath the insulation

The insulation provides safety when handling electrical installations, but it does not cut, grip or crimp. The mechanical properties of the basic tool, such as cutting performance, precision and stability, therefore style part of the overall quality of insulated tools.

With our insulated pliers, users can depend on the quality and durability of products from KNIPEX production. For assembly tools insulated by us, we use basic tools from tried and tested suppliers whose quality we subject to regular, stringent checks. The expert can rely on this double dependability of tool and insulation.



Testing dielectric strength, subjecting each pair of pliers to a load of 10.000 V AC.



Testing the adhesion of the VDE insulating grips with 500 N at 70° C.




Pressure test at 70°C.




Low temperature impact test at -25°C.



Testing the electrical insulating properties.

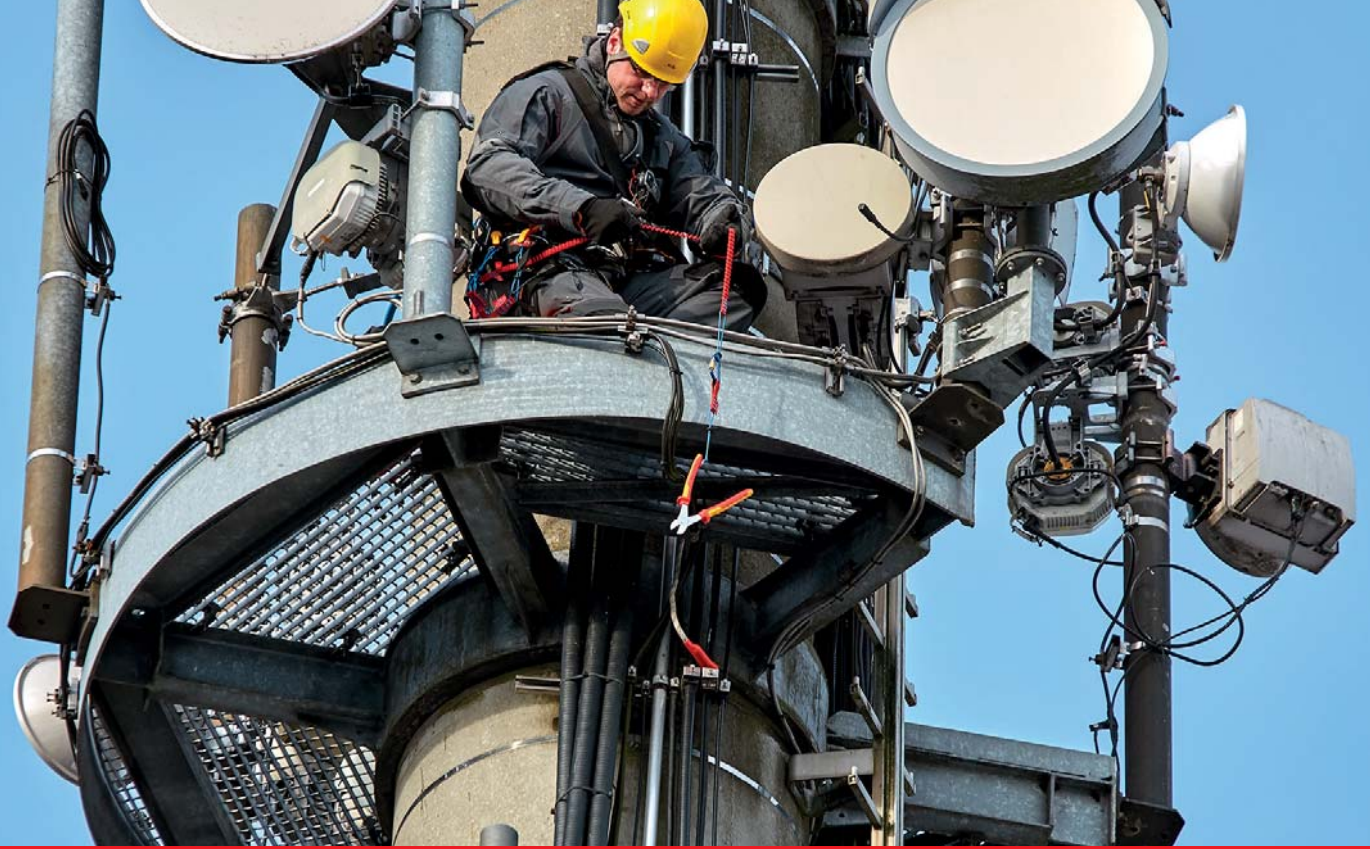

## VDE-tested tools with drop protection system

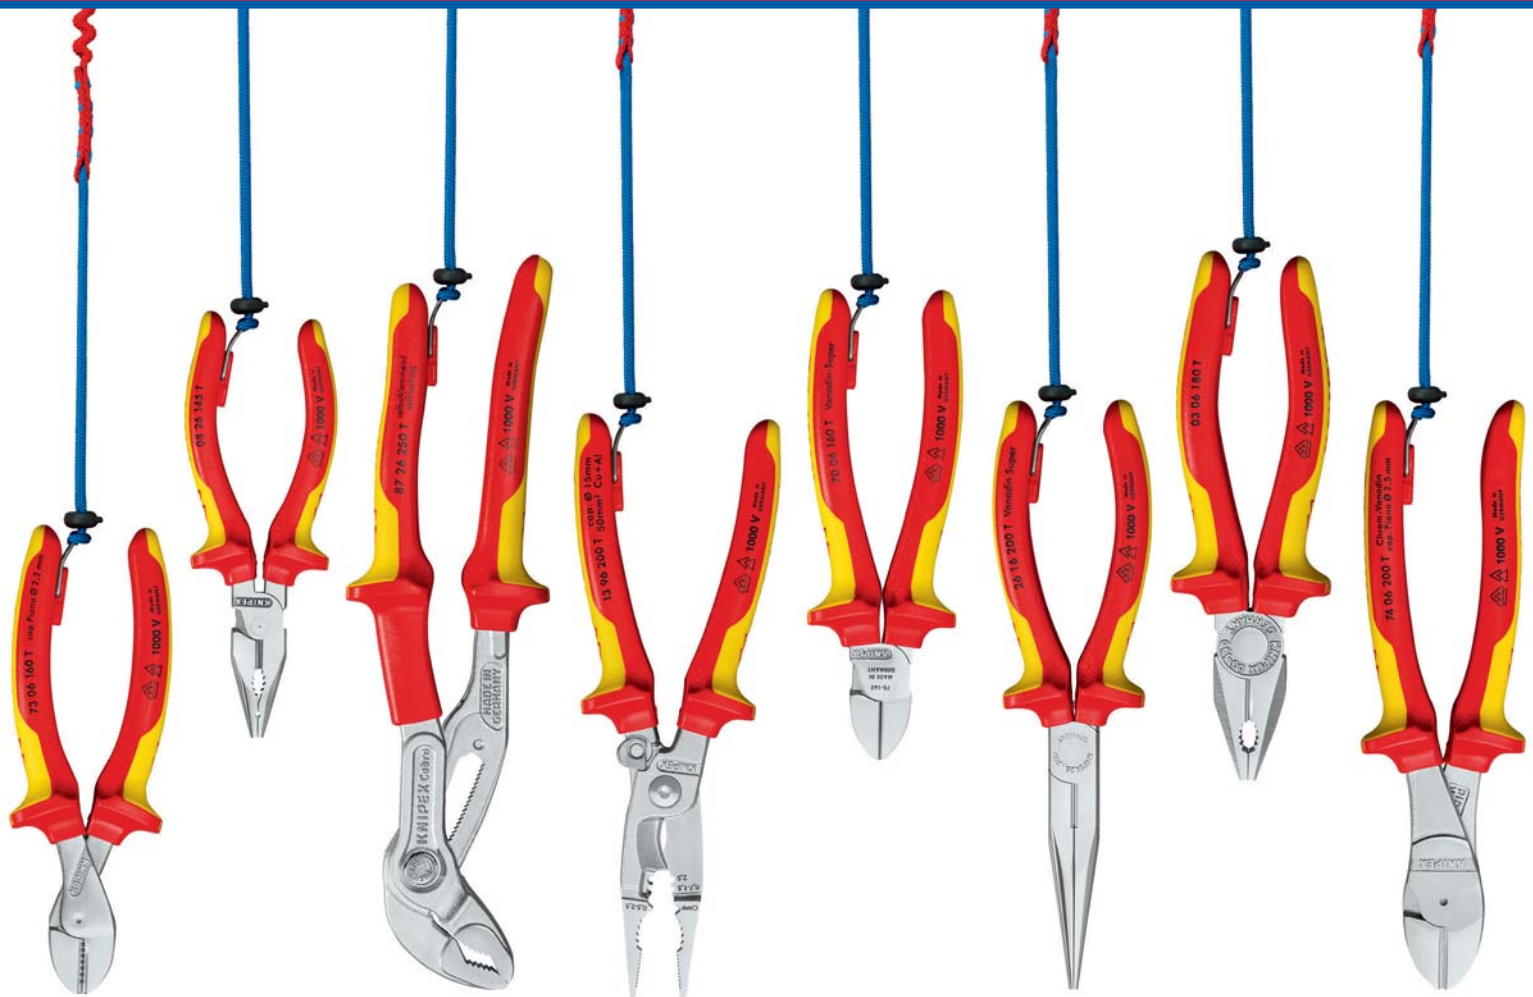

## KNIPEX Tethered Tools, VDE-tested





Flexible drop protection system

T















Working at heights and live line working are associated with greater risk

Using the Tethered Tools versions of the individually tested KNIPEX VDE pliers significantly reduces hazards caused by falling tools

- > 16 different models of insulated KNIPEX pliers available in a Tethered Tools version (others on request)
- > Tool is reliably protected by a tether, adapter strap and material carabiner
- > Doubly safeguarded work: extremely stable tether attachment welded tightly to the handle, for attaching a tether
- > Tether attachment does not get in the way during unsecured work on the ground
- > Handles with insulating multi-component grips, additionally tested for stress from heat, cold, tension and impact; tested in accordance with DIN EN/IEC 60900. VDE

	Article No.	Contents
<b>Tool protection system for tools with tether attachment: effective protection against accidents caused by falling tools</b>		
	00 50 01 T BK	1 x tether large working radius: the gathered fabric tape expands when under strain to a length of up to 1.5 m
	00 50 02 T BK	3 x adapter straps, flexible connection between tool and secure attachment point
	00 50 03 T BK	2 x carabiners, screw lock screwed tight prevents the material snap hook opening unintentionally
	00 50 04 T BK	<b>N</b> Tethering system set, for versatile ways of attaching KNIPEX pliers to a tether attachment (1 x tether, 3 x adapter straps, 2 x carabiner)

Our tool securing system is also suitable for our wide range of VDE-tested screwdrivers

	Article No.	Contents
<b>VDE-tested pliers with integrated insulated tether attachment for attaching a fall protection mechanism</b>		
	03 06 180 T chrome plated	Combination Pliers, with gripping zones for flat and round material
	08 26 145 T chrome plated	Needle-Nose Combination Pliers, working in confined areas thanks to slim head design
	11 06 160 T chrome plated	Insulation Stripper, for single, multiple and fine stranded conductors with plastic or rubber insulation
	13 96 200 T chrome plated	Pliers for Electrical Installation multifunctional pliers for the electrical installation
	13 66 180 T chrome plated	KNIPEX StriX Insulation Stripper with Cable Shears
	25 06 160 T chrome plated	Snipe Nose Side Cutting Pliers, Radio Pliers, suitable for finer gripping and cutting work, half-round, long, pointed jaws
	26 16 200 T chrome plated	Snipe Nose Side Cutting Pliers (Stork Beak Pliers) highly loadable, elastic precision points, flat rounded, long jaws
	26 26 200 T chrome plated	26 16 200 T: straight 26 26 200 T: bent
	70 06 160 T chrome plated	Diagonal Cutter Slim head for use in inaccessible work areas; available with fall protection in a compact length of 160 mm and a robust 180 mm length
	70 06 180 T chrome plated	
	73 06 160 T chrome plated	KNIPEX X-Cut® Compact Diagonal Cutter for very tough, continuous use
	74 06 200 T chrome plated	High Leverage Diagonal Cutter high cutting performance with minimum effort, available with fall protection mechanism in lengths of 200 mm and 250 mm
	74 06 250 T chrome plated	
	87 26 250 T chrome plated	KNIPEX Cobra® VDE, Hightech Water Pump Pliers, insulated, adjustment by shifting one jaw directly onto the workpiece and nuts
	95 16 165 T chrome plated	Cable Shears, precision ground, hardened blades: clean and smooth cut without crushing and deformation
	97 78 180 T polished	Crimping Pliers for end sleeves (ferrules), secure crimping in 9 marked half-round dies with tapered side surfaces



The through hole on the handle of all KNIPEX screwdrivers permits connection to our tool securing system, illustrated here on the handle of our new KNIPEX "Slim" screwdriver for PlusMinus profile screws.

# New Products 2018



**KNIPEX Twistor16**

97 53 18



**Wire Rope Cutter**

95 62 160



**KNIPEX TwistCut**

97 22 01 SB / 97 22 02 SB



**Electricians' shears**

95 05 10 SB



**Pliers Wrench**

86 02 250

**KNIPEX TwistCut**

Corrugated Pipe Cutter

90

(PAT. PEND.)

For the reliable and fast cutting of plastic corrugated pipes with the universal capacity range of diameters from 13 to 32 mm

No damage to the internal cables or pipes

- > Simple insertion, reliable and easy cutting without waste
- > Precise cut without damage thanks to unique arrangement of the cutters with side guide
- > Good accessibility thanks to slim design
- > Made of glass fibre reinforced multi-component plastic with soft gripping zone

**90 22 02 SB**

- > With wire stripping blades for cross-sections of 0.2/0.3/0.8/1.5/2.5/4.0 mm<sup>2</sup>
- > Location ridges (patent pending) on the 1.5 and 2.5 mm<sup>2</sup> wire stripping blades for the fast insertion of cable
- > Internal length scale for consistent stripping of cable, legible for both right and left handed users



Clean cutting edge with no damage to internal cables as the cut is always at the top of the corrugation




90 22 02 SB: Practical locator simplifies the insertion of single conductors for stripping

Article No.	EAN	Corrugated pipe cutting performance Ø mm	Stripping capacities mm <sup>2</sup>	↔ mm
90 22 01 SB	082286	13 - 32		100
90 22 02 SB	082293	13 - 32	0.2 - 4.0	100

**NEW****90 22 01 SB**

Without stripping function



Internal blades with lateral guide to protect against injuries

**90 22 02 SB**

With stripping function



Also for protective pipes on aluminium composite pipes in plumbing, up to a diameter of 32 mm



Easy to use: press KNIPEX TwistCut together, turn with slight pressure, done

**Electricians' shears**


Universal shears with crimp area for electricians

95

**New: with crimp function for end sleeves (ferrules)**

- > Precisely ground blades with fine serration for clean, non-slip (nonskid) cut
- > Crimp zone for crimping end sleeves (ferrules) up to a diameter of 6.0 mm
- > With plastic belt pouch
- > Handles with multi-component grips, glass fibre reinforced
- > Cutting edges made from stainless steel, hardness of cutting edges 56 HRC

Article No.	EAN	↔ mm
95 05 10 SB	082125	160

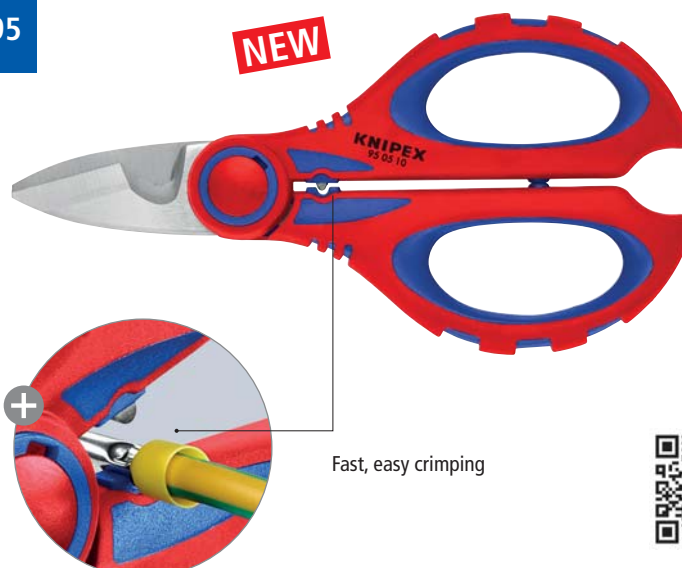**NEW**

Fast, easy crimping



## Wire Rope Cutter

Also for high-strength wire rope

95

Compact size, low weight, high performance level

High transmission joint design makes cutting 20% easier

Especially precise cutter guide thanks to box joint fitted with additional stabilisation plate

- > For cutting high-strength wire ropes up to Ø 4 mm and cable up to Ø 6 mm
- > At just 160 mm long, considerably more powerful than many larger wire rope cutters
- > Convenient work thanks to opening spring
- > Secured by locking device during transport
- > Cutting edges additionally induction hardened
- > Ball bearing steel for a long service life



Double-bearing joint



User-friendly and reliable thanks to locking device and opening spring



Article No.	EAN	Ø mm	Ø mm	↔ mm
95 62 160	N 082354	6.0	4.0	160
95 62 160 SB	N 082712	6.0	4.0	160

NEW

95 62 160

## KNIPEX Twistor16

Self-adjusting crimping pliers for end sleeves (ferrules) with rotating crimp head

97  
53

Crimp head can be freely rotated 360°, with 8 locking positions

Square crimp profile, high capacity range of 0.14 to 16 mm²

End sleeves (ferrules) can be crimped from almost any working position

- > Crimping pliers adjust automatically to different cross-sections
- > Crimp opening accessible from both sides, extra-long end sleeves can be fed in
- > Crimping of twin end sleeves (ferrules) up to 2 x 6 mm² possible
- > Repetitive, high crimping quality due to integral lock (self-releasing mechanism)
- > Light and handy tool, manual force reinforced by toggle lever mechanism
- > Chrome vanadium electric steel in special quality, oil-hardened




Crimp head can be rotated 360°



Uniquely flexible: connectors can be inserted in the rotatable crimp head from almost any position

Article No.	EAN	Capacity mm²	AWG	Number of crimping positions	↔ mm
97 53 18	N 082729	0.14 - 16	26 - 5	1	200

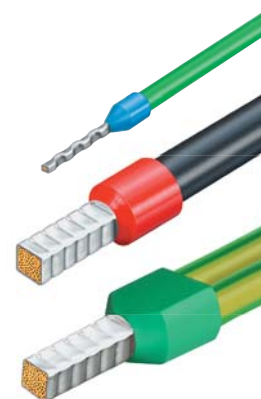

Hexagonal compression

## Automatic Stripping Pliers

For multicore cable Ø 4.4 to Ø 7.5 mm  
with irregular sheathing cross-section

12  
74

For control and sensor cables / actuator cables, also for stripping flexible 3-core feed cables and extension cable

Automatic adjustment to cable diameters between 4.4 and 7.5 mm


No damage to the inner conductor or shield braid

- > For oil-resistant, halogen-free control and sensor/actuator cables with multicore cable design, shielded and unshielded
- > Suitable for highly flexible TPE-U-pipes, PUR and PVC cable sheathing, rubber leads such as H05 etc.
- > Long stripping lengths possible
- > Body: plastic, fibreglass-reinforced
- > Exchangeable blade: special tool steel, oil-hardened



12 74 180 SB

**NEW**

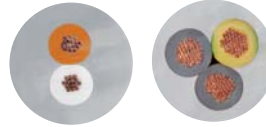

Sectional view of an extension lead



Required stripping length easy to read off



Complex cutter design for precise and damage-free stripping of round cables

Article No.	EAN	Stripping capacities Ø mm	↔ mm
12 74 180 SB <b>N</b>	082323	4.4 - 7.5	175
12 79 31 <b>N</b>	082682	1 pair of spare blades for 12 74 180 SB	

## KNIPEX ErgoStrip® L Universal Stripping Tool

16  
95

For the fast and precise dismantling and stripping of all common round and damp-proof installation cables (e.g. NYM cable 3 x 1.5 mm² up to 5 x 2.5 mm²), data cable (e.g. twisted pair) and coax cable  
Innovative, ergonomic pistol grip design for easy cutting, stripping and longitudinal cut of the sheath

- > Conical, slimmed down tool ends for better access in confined areas
- > Stripping device for cross-sections 0.2/0.3/0.8/1.5/2.5/4 mm²
- > Simplified insertion of single wires for stripping using location ridges
- > With opening spring and locking device
- > Easy insertion of coax and data cable thanks to opening aid
- > Multi-component design with a soft plastic zone for comfortable use and a secure grip
- > Housing made from stable glass fibre reinforced plastic



Stripping of a NYM cable



Stripping of a coax cable




Wire stripping on single conductors

**NEW**



(PAT. PEND.)

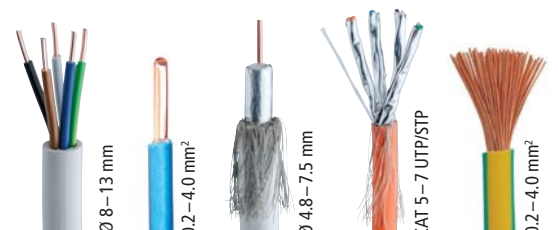

Article No.	EAN		Stripping capacities				↔ mm
			round cable Ø mm	conductors and strands mm²	data cable	coax cable Ø mm	
16 95 02 SB <b>N</b>	082910	MM	8 - 13	0.2 - 4	CAT 5 - 7, Twisted pair (UTP/STP)	4.8 - 7.5	135

## Range boxes of end sleeves (ferrules)

Brand sleeves from German production

97

Practical dispenser box, stackable and reclosable

NEW

- > Handy and transparent dispenser box
- > Rotatable lid with opening to take out individual end sleeves (ferrules)
- > Format: Ø 90 mm, height 44 mm

97 99 905 / 97 99 906 / 97 99 907

- > equipped with insulated end sleeves (ferrules) to DIN colour code

97 99 908 / 97 99 909

- > equipped with insulated twin end sleeves (ferrules) to DIN colour code

97 99 910 / 97 99 911

- > equipped with uninsulated end sleeves (ferrules)



97 99 906

97 99 908

97 99 910

Article No.	EAN 4003773-	
97 99 905 <b>N</b>	082446	With 30 pieces each insulated 0.25 / 0.34 / 0.5 / 1 mm <sup>2</sup> end sleeves (ferrules)
97 99 906 <b>N</b>	082453	With 50 pieces each insulated 0.5 and 2.5 mm <sup>2</sup> and 100 pieces each 0.75 / 1 / 1.5 mm <sup>2</sup> end sleeves (ferrules)
97 99 907 <b>N</b>	082460	With 50 pieces insulated 4.0 mm <sup>2</sup> , 20 pieces each 6.0 and 10.0 mm <sup>2</sup> , 10 pieces 16 mm <sup>2</sup> end sleeves (ferrules)
97 99 908 <b>N</b>	082477	With 50 pieces each twin end sleeves (ferrules) 2 x 0.75 / 1 / 1.5 / 2.5 mm <sup>2</sup>
97 99 909 <b>N</b>	082484	With 20 pieces twin end sleeves (ferrules) 2 x 4 mm <sup>2</sup> , 10 pieces each 2 x 6 and 2 x 10 mm <sup>2</sup> , 5 pieces 2 x 16 mm <sup>2</sup>
97 99 910 <b>N</b>	082491	With 500 pieces each 0.5 and 0.75 mm <sup>2</sup> , 400 pieces 1.0 mm <sup>2</sup> , 300 pieces 1.5 mm <sup>2</sup> , 200 pieces 2.5 mm <sup>2</sup> non-insulated end sleeves (ferrules)
97 99 911 <b>N</b>	082507	With 150 pieces 4.0 mm <sup>2</sup> , 75 pieces each 6.0 and 10.0 mm <sup>2</sup> , 50 pieces 16.0 mm <sup>2</sup> non-insulated end sleeves (ferrules)

## F-compression connector

97

9

- > Suitable for coax cable with outer diameter of 7 mm and dielectric from 4.7 mm diameter (all standard coax cable with Ø 1.1 mm inner conductor)
- > Nitin-6™ coating ensures excellent protection against environmental influences
- > Waterproof (8h/at a depth of 30 m), ideal for connection to LNB and external antennae
- > Suitable for KNIPEX 97 40 20 compression tool
- > 10 Cablecon F-compression connectors in a blister pack

NEW



Artikel-Nr.	EAN 4003773-	
97 99 500 <b>N</b>	082378	10 pieces each

## KNIPEX CoBolt® S

71

Compact and powerful

Extremely high cutting performance in a convenient length of 160 mm

Small, slim head for excellent accessibility

NEW



Article No.	EAN 4003773-	Ø mm	Ø mm	Ø mm	Ø mm	mm
71 01 160 <b>N</b>	082668	5.3	4.4	3.2	3.0	160

## Pliers Wrench

86

Increased gripping capacity due to two additional setting positions: flexible gripping of all widths across flats up to 52 mm

15% less weight with the same stabilit

NEW



86 01 250



Practical adjustment scale: a laser-cut scale allows the wrench opening to be set before gripping



86 02 250



86 06 250



Article No.	EAN 4003773-	Adjustment positions	Inch	mm	mm
86 01 250 <b>N</b>	082385	19	2	52	250
86 02 250 <b>N</b>	082392	19	2	52	250
86 06 250 <b>N</b>	082408	19	2	52	250

## Tool Case "Robust 34" Electric

26 parts

00


For the toughest operating conditions: dust-tight, waterproof and temperature resistant

Filled with 26 branded tools for professional electricians

- > Fit to fly case, made from impact-resistant polypropylene
- > Clear, tried and tested layout
- > Padlock eyelets
- > Air pressure compensation valve
- > Document compartment; tool panels made of Con-Pearl® with pouches that can be filled with tools
- > Base tray with aluminium separators, 510 x 419 x 215 mm
- > 34 litre capacity
- > Maximum load of 25 kg

### 00 21 36 LE

- > Case supplied without tools

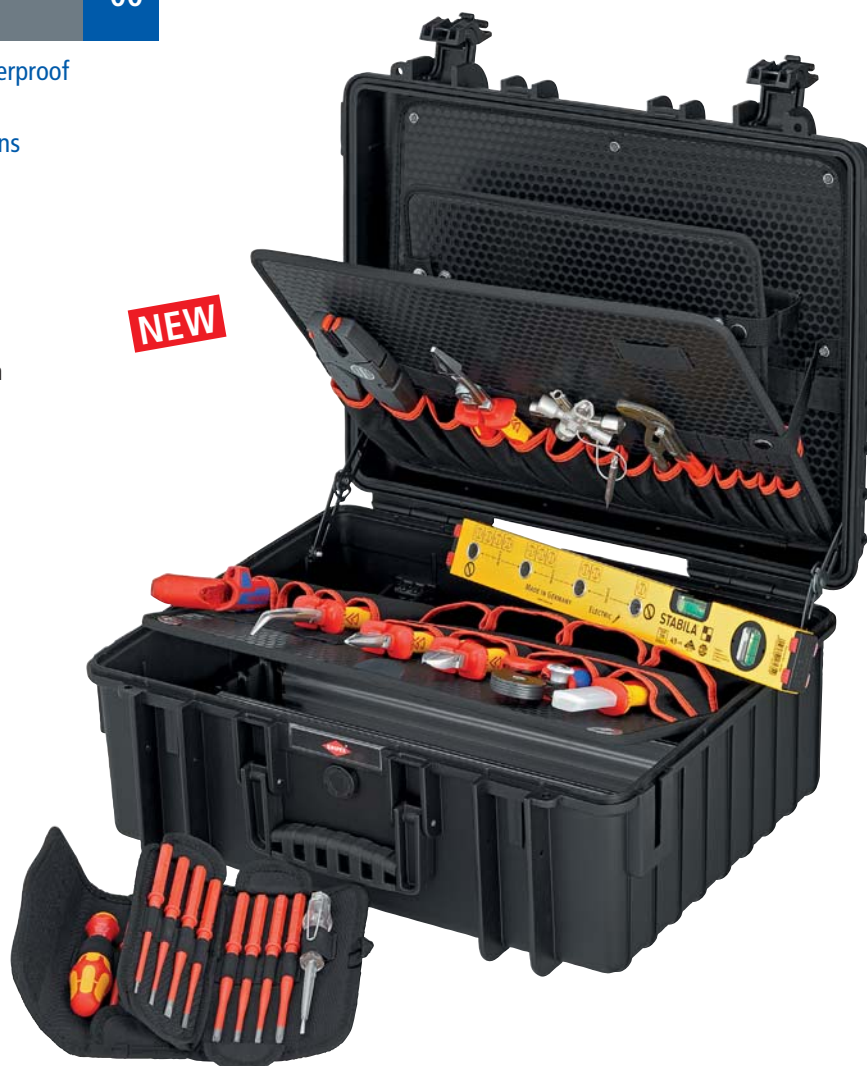

Article No.	EAN					Quantity	Nominal size	g
00 21 36	N 082583			Tool Case "Robust 34" Electric, 26 parts				10000
			00 11 01	KNIPLEX TwinKey®, for all standard cabinets and shut-off systems	Knipex	1		
		⚠ 1000 V	08 26 145	Needle-Nose Combination Pliers	Knipex	1	145 mm	
		MM	200	Self-Adjusting Insulation Strippers	Knipex	1	200 mm	
		⚠ 1000 V	13 86 200	Pliers for Electrical Installation	Knipex	1	200 mm	
		MM	16 95 01 SB	KNIPLEX ErgoStrip®, Universal Dismantling Tool	Knipex	1	135 mm	
		⚠ 1000 V	70 06 160	Diagonal Cutter	Knipex	1	160 mm	
			87 01 180	KNIPLEX Cobra®, Hightech Water Pump Pliers	Knipex	1	180 mm	
		MM	97 53 04	Self-Adjusting Crimping Pliers for End Sleeves (ferrules), with lateral access	Knipex	1	180 mm	
		⚠ 1000 V	98 52	Cable Knife	Knipex	1	185 mm	
		⚠ 1000 V	003484	VDE Kraftform Kompakt 60iS/65iS/67iS/16 (Slim) Content 1 each: 1 holding handle 817 VDE; blade length 154 mm: slot 0.4 x 2.5 / 0.6 x 3.5 / 0.8 x 4.0 / 1.0 x 5.5; cross PH 1 / PH 2 / PZ 1 / PZ 2; PlusMinus PZ/S # 1 / PZ/S # 2; TORX® TX 10 / TX 15 / TX 20 / TX 25; voltage tester 0.5 x 30 x 70	Wera	1		
			16135	Model 70 Electric spirit level	Stabila	1	430 mm	
00 21 36 LE	N 082576			Case supplied without tools				7100

## Tool Case "Robust 45" Electric

63 parts

00

For the toughest operating conditions:  
dust-tight, waterproof and temperature resistant

Extensively filled with 63 branded tools for professional electricians




- > Fit to fly case, made from impact-resistant polypropylene
- > Clear, tried and tested layout
- > Can be used as trolley: with telescopic handle and wheels
- > Padlock eyelets
- > Air pressure compensation valve
- > Gas pressure absorber in the hinge
- > Document compartment; tool panels made of Con-Pearl® with pouches that can be filled with tools
- > Pneumatically cushioned lid
- > Base tray with aluminium separators, 609 x 428 x 263 mm
- > 45 litre capacity
- > Maximum load of 35 kg

## 00 21 37 LE

- > Case supplied without tools

NEW

Gas pressure absorber in the hinge: convenient opening of the lid of the case, with no risk of injury from the case closing inadvertently

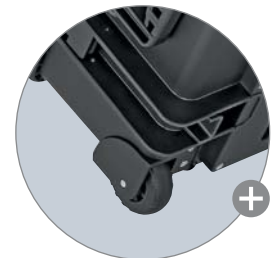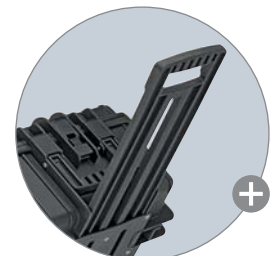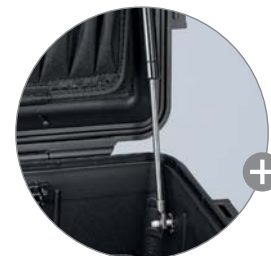

With large easy-roll wheels and telescopic handle for convenient transportation – also on uneven ground

Article No.	EAN 4003773-					Quantity	Nominal size	g
00 21 37 LE	082606		Tool Case "Robust 45" Electric, 63 parts					15000
			00 11 01	KNIPLEX TwinKey®, for all standard cabinets and shut-off systems	Knipex	1		
		⚡ 1000 V	08 26 145	Needle-Nose Combination Pliers	Knipex	1	145 mm	
		MM	12 42 195	KNIPLEX MultiStrip 10, Automatic Insulation Stripper	Knipex	1	195 mm	
		⚡ 1000 V	13 86 200	Pliers for Electrical Installation	Knipex	1	200 mm	
		MM	16 95 01	KNIPLEX ErgoStrip®, Universal Dismantling Tool	Knipex	1	135 mm	
		⊖	26 26 200	Snipe Nose Side Cutting Pliers (Stork Beak Pliers)	Knipex	1	200 mm	
		⚡ 1000 V	70 06 160	Diagonal Cutter	Knipex	1	160 mm	
		⚡ 1000 V	74 06 200	High Leverage Diagonal Cutter	Knipex	1	200 mm	
		⚡	86 03 180	Pliers Wrench, pliers and a wrench in a single tool	Knipex	1	180 mm	
		⚡	87 01 180	KNIPLEX Cobra®, Hightech Water Pump Pliers	Knipex	1	180 mm	
		⚡ MM	97 53 04	Self-Adjusting Crimping Pliers for End Sleeves (ferrules), with lateral access	Knipex	1	180 mm	
		⚡ 1000 V	98 52	Cable Knife	Knipex	1	190 mm	
		⚡ 1000 V	98 25 01 SL	Screwdriver (Slim) for cross-recessed screws, Pozidriv®	Knipex	1	187 mm	
		⚡ 1000 V	98 20 35 SL	Screwdriver (Slim) for slotted screws	Knipex	1	202 mm	
			3003010119	Locksmith's hammer, 300 g	Picard	1		
			004018	8100 SA 8 Zyklop set of metal ratchets; content 1 each: metal ratchet Zyklop, Zyklop sockets 5 - 13 mm, Zyklop extension bars with Flexible-Lock-System, Wobble-Extension, 1 connection part with quick-change chuck, bits in 50 mm length: PH; PZ; TORX®; hexagonal socket	Wera	1	1/4"	
			003760	Joker open-end wrench	Wera	1	10x13 mm	
		⚡ 1000 V	003484	VDE Kraftform Kompact 60iS/65iS/67iS/16 (Slim) Content 1 each: 1 holding handle 817 VDE; blade length 154 mm: slot 0.4 x 2.5 / 0.6 x 3.5 / 0.8 x 4.0 / 1.0 x 5.5; cross PH 1 / PH 2 / PZ 1 / PZ 2; PlusMinus PZ/S # 1 / PZ/S # 2; TORX® TX 10 / TX 15 / TX 20 / TX 25; voltage tester 0.5 x 30 x 70	Wera	1		
			18115	Pocket Electric mini spirit level	Stabila	1	68 mm	
			16135	Model 70 Electric spirit level	Stabila	1	430 mm	
			361 252 1	Electrician's Chisel	Rennsteig	1	250x10 mm	
00 21 37 LE	082590		Case supplied without tools					10800

Con-Pearl® is a registered trademark of friedola TECH GmbH

# **KNIPEX X-Cut®** **Compact Diagonal Cutter**

73

Powerful, light and universal

Cuts finest strands as well as multi-core cables and piano wires

- > Box-joint design: highest stability with low weight
- > Doubly supported joint axis for heaviest duty
- > High cutting performance with minimum effort due to optimum co-ordination of the cutting edge angle and transmission ratio
- > 40% less force required compared with standard diagonal cutters of the same length
- > Large opening width for thicker cables
- > Cuts precisely, even through fine copper wires
- > Compact, low-weight construction
- > Universally usable, in the assembly, maintenance and production
- > Chrome vanadium heavy-duty steel, forged, multi stage oil-hardened



**1000 V**



73 06 160










73 02 160



73 05 160



Article No.	EAN 4003773-	 Ø mm	 Ø mm	 Ø mm	 Ø mm	 Ø mm	 Ø mm
<b>73 02 160</b>	075127	4.8	3.8	2.7	2.2	12.0	160
<b>73 05 160</b>	075134	4.8	3.8	2.7	2.2	12.0	160
<b>73 06 160</b>	075141	4.8	3.8	2.7	2.2	12.0	160
<b>73 06 160 T</b>	081487	4.8	3.8	2.7	2.2	12.0	160

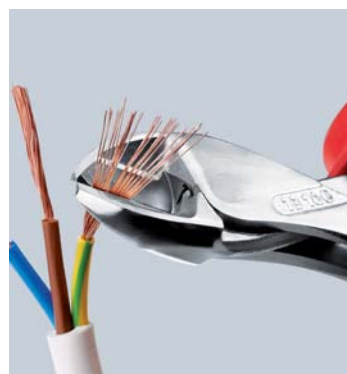

## Diagonal Cutters

70

















- > The indispensable diagonal cutter for all-round use
- > High-quality material and precise workmanship for long service life
- > Precision cutting edges for soft and hard wire
- > Clean cutting of thin copper wires, also at the cutting-edge tips
- > Cutting edges additionally induction hardened, cutting edge hardness approx. 62 HRC
- > Narrow head style for use in confined areas
- > Vanadium electric steel, forged, multi stage oil-hardened



Precision rivet:  
new and more stable rivet shape




70 06 160

Article No.	EAN 4003773-		 Ø mm	 Ø mm	 Ø mm	 mm
70 06 125	018124	 	3.0	2.3	1.5	125
70 06 140	040293	 	4.0	2.5	1.8	140
70 06 160	021995	 	4.0	3.0	2.0	160
70 06 160 T	081463	 	4.0	3.0	2.0	160
70 06 180	033813	 	4.0	3.0	2.5	180
70 06 180 T	081470	 	4.0	3.0	2.5	180



 1000 V

Cuts thin Cu wire accurately, ...

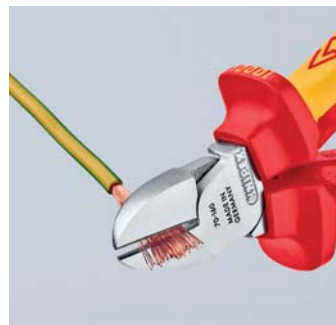

... also at the cutting-edge tips



## High Leverage Diagonal Cutters

74

- > With integrated forged axle for heaviest duty
- > Suitable for all types of wire including piano wire
- > High cutting performance with minimum effort due to optimum co-ordination of the cutting edge angle and transmission ratio

















### Length 250 mm

- > The 250-mm-long diagonal cutter is suitable for copper conductors of up to 16 mm<sup>2</sup> and aluminium conductors up to 35 mm<sup>2</sup>.



74 06 200





Article No.	EAN 4003773-		 Ø mm	 Ø mm	 Ø mm	 mm
74 06 160	040705	 	3.4	2.5	2.0	160
74 06 180	022985	 	3.8	2.7	2.2	180
74 06 200	033820	 	4.2	3.0	2.5	200
74 06 200 T	081494	 	4.2	3.0	2.5	200
74 06 250	041955	 	4.6	3.5	3.0	250
74 06 250 T	081500	 	4.6	3.5	3.0	250

## Magnetic LED Lamp

00

- > For illuminating dark working areas
- > Attachment to tool by means of strong magnets
- > Very compact dimensions
- > Approx. 24 hours of lighting, with 2 replaceable button cells (CR1220)
- > Snap-hook fastening
- > Impact-resistant plastic housing

Article No.	EAN 4003773-
00 11 V50	075387

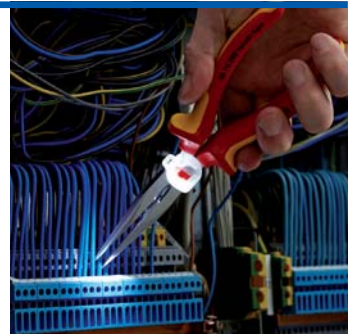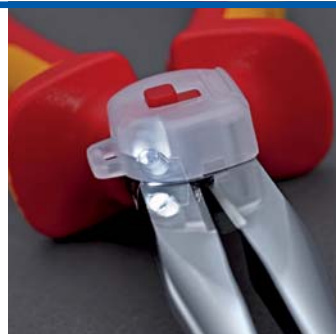

Multifunctional pliers for the electrical installation; to grip flat and round material, for bending, deburring, cutting cable, stripping and crimping end sleeves (ferrules)

## 6 functions in one pair of pliers

- > Smooth surfaces near the tips grip single cores without damaging them; serrated gripping surfaces and pipe grip for gripping flat and round material
- > Clear-cut outside edge on the jaw for working on flush-mounted junction boxes and deburring feed-through holes
- > Stripping holes for conductors of 0.75 – 1.5 mm<sup>2</sup> and 2.5 mm<sup>2</sup>
- > Crimp die for wire-end ferrules 0.5 – 2.5 mm<sup>2</sup>
- > Cable shears with (induction-hardened) precision cutting edges for copper and aluminium cables up to 5 x 2.5 mm<sup>2</sup>/dia. 15 mm
- > Gripping, without opening the pliers completely (intelligent latching mechanism in the spring assisted version). The cutting edge remains closed and protected
- > Slim dimensions for easy access
- > Bolted joint: precise, zero backlash operation of pliers



13 86 200




13 96 200  
MM



13 82 200



13 92 200  
MM

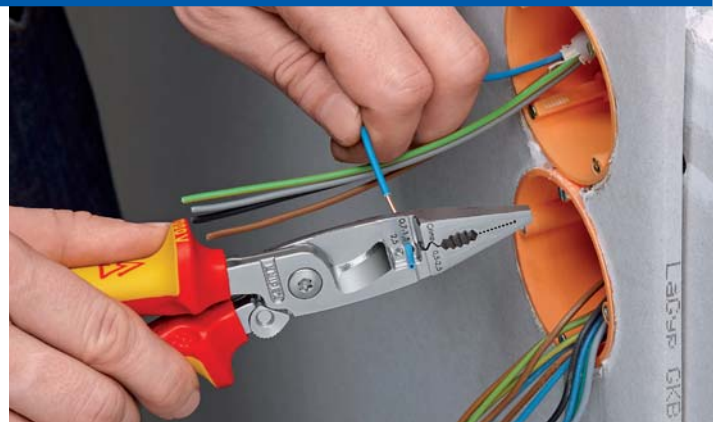

Article No.	EAN		Handles	Cutting capacity		
				Ø mm	mm <sup>2</sup>	mm
13 82 200	075080		with multi-component grips	15	50	200
13 86 200	075097	⚡ 1000 V	insulated with multi-component grips, VDE-tested	15	50	200
13 92 200	075103	MM	with multi-component grips	15	50	200
13 96 200	075110	MM ⚡ 1000 V	insulated with multi-component grips, VDE-tested	15	50	200
13 96 200 T	081425	MM ⚡ 1000 V	insulated with multi-component grips, VDE-tested	15	50	200





13 92 200 / 13 96 200

the intelligent latching mechanism enables you to "grip" without opening the pliers. The cutting edge remains closed and protected.

## Electricians' Pliers

13  
0

- > The ideal pliers for cable work
- > For gripping and bending wire
- > For cutting medium-hard and hard wire
- > Precision cutting edges additionally induction hardened, cutting edge hardness approx. 60 HRC
- > With precision stripping holes
- > For crimping end sleeves (ferrules)
- > Crimping 0.5 to 2.5 mm<sup>2</sup>

Article No.	EAN 4003773-		Stripping capacities Ø mm <sup>2</sup>	Ø mm	Ø mm	↔ mm
13 01 160	034971		0.5 - 0.75 / 1.5 / 2.5	2.5	1.6	160
13 02 160	010470		0.5 - 0.75 / 1.5 / 2.5	2.5	1.6	160



## Dismantling Pliers

13

**Multifunctional - cutting, dismantling and stripping with one pair of pliers**

For time-saving dismantling and stripping of all round sheathed and damp-proof installation cables (e.g. NYM cable)


Simplified access especially into deep mounted junction boxes thanks to slim head design and optimally angled cable sheath cutter


Strip cables easily and without damage thanks to circular cutting edge with depth limiter

- > Suitable for universal use: precision wire stripping holes for conductors from 1.5 and 2.5 mm<sup>2</sup>
- > With side cutters for cutting and trimming conductors, wires, small screws and nails
- > All cutters additionally induction hardened to approx. 61 HRC for high wear resistance
- > 30 % lighter than comparable pliers
- > Vanadium electric steel, forged, multi stage oil-hardened




Circular cutting edge with depth limiter: for easy dismantling without damage to inner cables

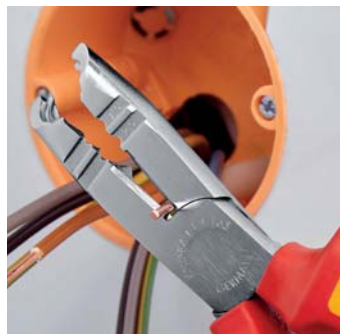

Article No.	EAN 4003773-		Pliers	Head	Handles	Cable stripping values Ø mm	Stripping capacities Ø mm <sup>2</sup>	Ø mm	Ø mm	↔ mm
13 46 165	079699		chrome plated		insulated with multi-component grips, VDE-tested	8 - 13	1.5 / 2.5	3.2	2.2	165

### Insulation strippers with cable shears – two essential electrical installation tools in one pair of pliers

- > For single, multiple and fine stranded conductors with plastic or rubber insulation with max. 5.0 mm dia. or resp. 10 mm<sup>2</sup> cable cross section
- > Increments in the jaw provide a visual orientation aid for stripping consistent lengths (11 mm and 16 mm)
- > Easy adjustment to the required diameter of solid or stranded wire with knurled screw and lock nut
- > Shear blade for cutting copper and aluminium cable of up to Ø 15 mm (5 x 2.5 mm<sup>2</sup>)
- > Slim dimensions for easy access
- > Bolted joint: precise, zero backlash operation of pliers
- > High-grade special tool steel, forged, multi stage oil-hardened

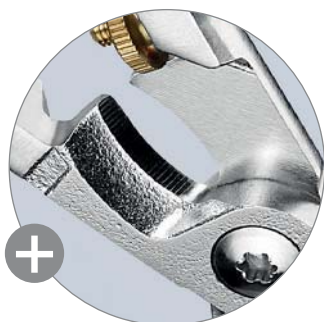


Induction hardened precision blade




13 66 180



Induction hardened shear blade with precisely ground cutting edges for crushing-free cutting of copper cables of up to Ø 15 mm (5 x 2.5 mm<sup>2</sup>)

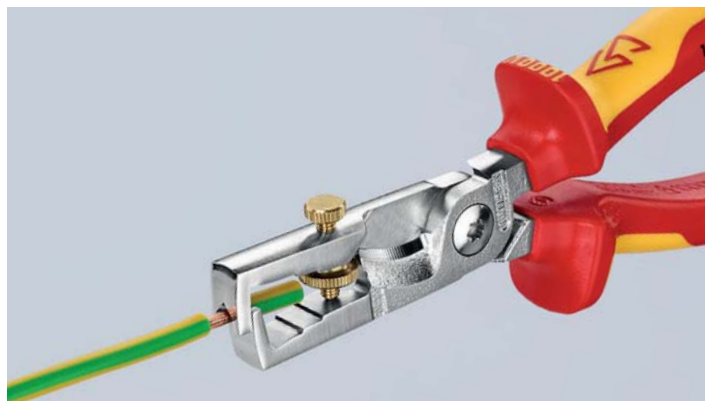

Lock nut prevents any unintentional adjustment

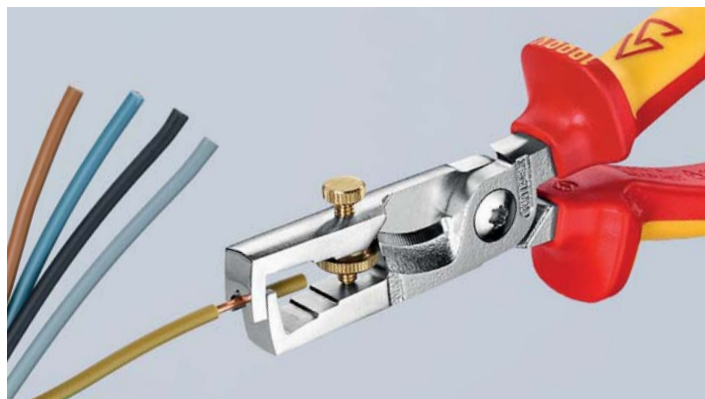

Length marking: visual markings provide support during repeated stripping of wire in standard lengths (11 and 16 mm)

StriX

Article No.	EAN		Pliers	Head	Handles	Cutting capacity		Stripping capacities		
						Ø mm	mm <sup>2</sup>	Ø mm	mm <sup>2</sup>	
13 62 180	081302		black atramentized	polished	with multi-component grips	15	50	5	10	180
13 66 180	081319	⚡ 1000 V	chrome plated	polished	insulated with multi-component grips, VDE-tested	15	50	5	10	180
13 66 180 T	081906	⚡ 1000 V	chrome plated	polished	insulated with multi-component grips, VDE-tested	15	50	5	10	180





## Insulation Strippers


11

- > For single, multiple and fine stranded conductors with plastic or rubber insulation with max. 5 mm dia. or resp. 10 mm<sup>2</sup> cable cross section
- > Easy adjustment to the required diameter of solid or stranded wire with knurled screw and lock nut
- > Special tool steel, forged, oil-hardened



11 06 160

Article No.	EAN 4003773-		Stripping capacities			↔
			Ø mm	mm <sup>2</sup>	AWG	mm
11 06 160	021933	 	5.0	10	7	160
11 06 160 T	081418	 	5.0	10	7	160

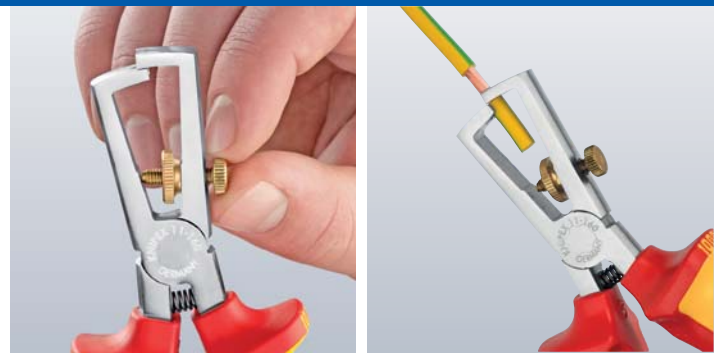



## Diagonal Insulation Stripper

14

With long cutter

High cutting capacity due to high leverage joint

- > Precision stripping holes for single (solid) conductors of 1.5 and 2.5 mm<sup>2</sup>
- > Convenient cutting of NYM cables of up to 5 x 2.5 mm<sup>2</sup>
- > Long tips for ultra fine cutting work also in confined areas
- > Induction hardened precision blades for soft wire of up to 4.0 mm dia., cutting edge hardness approx. 60 HRC

Article No.	EAN 4003773-		Stripping capacities mm <sup>2</sup>	AWG	Ø mm	Ø mm	↔
							mm
14 26 160	040279	 	1.5 + 2.5	15 + 13	2.5	1.5	160

















## Snipe Nose Side Cutting Pliers

26

- > Suitable for finer gripping and cutting work
- > Half-round, long, pointed jaws
- > Knurled gripping surfaces
- > With cutting edges for soft, medium-hard and hard wire
- > Cutting edges additionally induction hardened, cutting edge hardness approx. 61 HRC
- > Vanadium electric steel, forged, multi stage oil-hardened



Article No.	EAN 4003773-				Ø mm	Ø mm	↔
							mm
25 06 160	033806	 		pointed, half-round jaws	2.5	1.6	160
25 06 160 T	081432	 		pointed, half-round jaws	2.5	1.6	160
25 26 160	052111	 	≤40°	pointed, half-round jaws	2.5	1.6	160
26 16 200	022831	 		half-round, long, tapered jaws	3.2	2.2	200
26 16 200 T	081449	 		half-round, long, tapered jaws	3.2	2.2	200
26 26 200	022855	 	≤40°	half-round, long, tapered jaws	3.2	2.2	200
26 26 200 T	081456	 	≤40°	half-round, long, tapered jaws	3.2	2.2	200

Small High Leverage Combination Pliers with pointed jaw.  
For all common installation and repair work.

Handy use when working in confined areas thanks to slim head design and pointed jaws (anti-twist)

Gripping surfaces with special convex contour on one side for secure gripping of flat parts

Milled groove in the gripping area permits small parts such as nails, pins and bolts to be held and pulled

- > The reliable and diverse combination pliers when out and about
- > Easy cutting thanks to the high leverage joint
- > With cutting edges for soft, medium-hard and hard wire
- > Long service life and stable tips
- > Forged from special high grade tool steel, manifold oil-hardened



Milled groove in the gripping area



Firm grip also on flat material due to three-point rest



08 26 145



Article No.	EAN 4003773-		Pliers	Head	Handles	Cutting capacity				↔ mm
						Ø mm	Ø mm	Ø mm	mm²	
08 21 145	078951		black atramentized	polished	plastic coated	3.0	2.0	8.0	16.0	145
08 22 145	078968		black atramentized	polished	with multi-component grips	3.0	2.0	8.0	16.0	145
08 25 145	078975		chrome plated		with multi-component grips	3.0	2.0	8.0	16.0	145
08 26 145	079361		chrome plated		insulated with multi-component grips, VDE-tested	3.0	2.0	8.0	16.0	145
08 26 145 T	081401		chrome plated		insulated with multi-component grips, VDE-tested	3.0	2.0	8.0	16.0	145

## Combination Pliers

- > With gripping zones for flat and round material, suitable for versatile use
- > With cutting edges for soft and hard wire
- > Long cutting edges for thicker cables
- > Cutting edges additionally induction hardened, cutting edge hardness approx. 60 HRC
- > Special tool steel, forged, multi stage oil-hardened



03 06 180

Article No.	EAN 4003773-		Ø mm	Ø mm	Ø mm	mm²	↔ mm
			3.1	2.0	10.0	16.0	160
03 06 160	021902		3.1	2.0	10.0	16.0	160
03 06 180	021926		3.4	2.2	12.0	16.0	180
03 06 200	033776		3.8	2.5	13.0	16.0	200
03 06 180 T	081395		3.4	2.2	12.0	16.0	180

## Long Nose Pliers

30

- > Heavy-duty and hard-wearing gripping pliers
- > Different jaw styles
- > Chrome vanadium electric steel, forged, oil-hardened

Article No.	EAN 4003773-			↔ mm
30 16 160	001904	⚡ 1000 V	long, trapezoidal jaws, knurled gripping surfaces	160
30 36 160	002123	⚡ 1000 V	long, round jaws, smooth gripping surfaces	160



## Flat Nose Pliers

Of plastic insulating

98

6

- > Fully insulating to reduce risk of short circuit
- > For meter assembly and meter blocking
- > Class C; range of use up to -40°C
- > Plastic material, fibreglass-reinforced
- > Handles with soft plastic zone for better grip

Article No.	EAN 4003773-		↔ mm
98 62 01	073956	⚡ 1000 V	180
98 62 02	073963	⚡ 1000 V	220



## KNIPEX Cobra®

Hightech Water Pump Pliers, VDE-tested

87

2

Adjustment by shifting one jaw directly on to the workpiece: fast, reliable and comfortable handling

Opening at the touch of a button apart from the workpiece

- > Self-locking on pipes and nuts: no slipping on the workpiece and low handforce required
- > Fine adjustment for optimum adaptation to different sizes of workpieces and a comfortable handle width
- > Chrome vanadium electric steel, forged, multi stage oil-hardened



Article No.	EAN 4003773-		Adjustment positions	Ø Inch	Ø mm	mm	↔ mm
87 26 250	071495	⚡ 1000 V	24	2	50	46	250
87 26 250 T	081517	⚡ 1000 V	24	2	50	46	250



## KNIPEX Alligator®

Water Pump Pliers, VDE-tested

88

- > Good access to the workpiece due to slim size of head and joint area
- > Self-locking on pipes and nuts: no slipping on the workpiece and low handforce required
- > Chrome vanadium electric steel, forged, multi stage oil-hardened

Article No.	EAN 4003773-		Adjustment positions	Ø Inch	Ø mm	mm	↔ mm
88 06 250	039303	⚡ 1000 V	9	2	50	46	250



# Alligator®

## Cable Shears

95

- > For cutting copper and aluminium single conductors as well as multiple stranded cables
- > Not suitable for steel wire and hard drawn copper conductors
- > Precision ground, hardened blades
- > Clean and smooth cut without crushing and deformation
- > Easy cutting with one-hand operation
- > Guard prevents operators' fingers being pinched
- > Adjustable bolted joint, self-retaining screw
- > High-grade special tool steel, forged, oil-hardened

### 95 26 165

- > Internal opening spring, protected and captive

### 95 41 165

- > Multifunctional tool for working on NYM cable from 3 x 1.5 mm<sup>2</sup> to 5 x 2.5 mm<sup>2</sup> (cutting and stripping)



Article No.	EAN 4003773-		Ø mm	mm <sup>2</sup>	AWG	↔ mm
95 11 165	040323		15	50	1/0	165
95 12 165	029182		15	50	1/0	165
95 16 165	039648	⚡ 1000 V	15	50	1/0	165
95 16 165 T	081524	⚡ 1000 V	15	50	1/0	165
95 26 165	069980	⚡ 1000 V	15	50	1/0	165
95 41 165	078609	⚡	12	35	1/0	165



95 16 165

## Cable Shears with twin cutting edge

95

- > For cutting copper and aluminium cables
- > Not suitable for steel wire and hard drawn copper conductors
- > Precision ground, hardened blades
- > Clean and smooth cut without crushing and deformation
- > Easy cutting with one-hand operation
- > Initial and final cut (upper and lower blade) allows cables of up to Ø 20 mm to be cut
- > Low handforce required due to favourable lever ratio and special blade geometry
- > Guard prevents operators' fingers being pinched
- > Adjustable bolted joint, self-retaining screw
- > High-grade special tool steel, forged, oil-hardened

PATENTED



**Initial cut:** using the front cutting edge to cut the insulating sheath on larger cable diameters retains an ergonomic handle opening width.



95 16 200

Article No.	EAN 4003773-		Ø mm	mm <sup>2</sup>	AWG	↔ mm
95 12 200	047834		20	70	2/0	200
95 16 200	026761	⚡ 1000 V	20	70	2/0	200



**Final cut:** after cutting the sheath in the front profile the conductors in the rear part are cut. Initial cut in the front profile, final cut in the rear profile - to keep it as easy as possible.


## Cable Cutters ratchet action

95  
3

- > For cutting copper and aluminium single conductors as well as multiple stranded cables
- > Not suitable for steel wire and wire ropes
- > Precision ground, hardened blades
- > Clean and smooth cut without crushing and deformation
- > One-hand operation using ratchet principle
- > Little handforce required due to very high transmission ratio
- > Two-stage ratchet drive for easy cutting
- > Simple handling as a result of low weight and compact design – can be used even in confined areas
- > Guard prevents operators' fingers being pinched
- > High-grade special tool steel, forged, oil-hardened



95 36 280

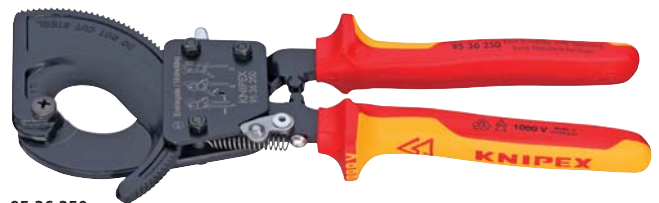










95 36 250

95 36 250



95 36 280



Article No.	EAN 4003773-		 Ø mm	 mm <sup>2</sup>	MCM	 mm
95 36 250	026884	  1000 V 	32	240	500	250
95 36 280	026891	  1000 V 	52	380	750	280

## Cable Cutters (ratchet principle)

95  
3

Sturdy. Easy to use. Stable








Innovative ratchet-drive

For cable up to 60 mm diameter

- > Easy handling due to low weight (825 g) and compact construction (320 mm length) – also usable in confined areas
- > Cutting through copper and aluminium cables with diameters of up to 60 mm in one-hand and two-hand operation
- > Hardened cutting edges, precisely ground, cut smoothly and neatly without crushing
- > For cutting copper and aluminium single conductors as well as multiple stranded cables (not suitable for steel wire and wire ropes)
- > Innovative three-stage ratchet-drive with high leverage for easy cutting in one-hand and two-hand operation
- > Innovative high leverage three-stage ratchet-drive
- > Fixed handle with support area for putting down the pliers when cutting
- > High-grade special tool steel, forged, oil-hardened



95 36 320

Article No.	EAN 4003773-		 Ø mm	 mm <sup>2</sup>	MCM	 mm
95 32 320	075172		60	600	1200	320
95 36 320	075189	  1000 V 	60	600	1200	320

## Cable Cutters (ratchet action)

For steel wire armoured cables (SWA cable)

95  
3

Cuts through steel wire armoured cables with a diameter of up to 45 mm / 380 mm<sup>2</sup> (e.g. 4 x 95 mm<sup>2</sup>) using one or two-handed operation

- > Simple handling due to low weight (800 g) and compact design (315 mm length) – can also be used in confined areas
- > Precision ground blades and induction hardened cutting edges cut smoothly and neatly without crushing
- > Innovative high leverage three-stage ratchet-drive
- > Support area for putting down the pliers when cutting
- > Not suitable for cutting ACSR cable and wire rope!
- > High-grade special tool steel, forged, multi stage oil-hardened



Article No.	EAN 4003773-		Ø mm	mm <sup>2</sup>	MCM	↔ mm
95 32 315 A	078562	MM	45	380	750	315
95 36 315 A	078579	1000 V MM	45	380	750	315



95 36 315 A

## ACSR Cable Cutter (ratchet action)

95

For cables with a steel core


Handy. Compact. Sturdy.

Extremely robust design

- > Cuts through aluminium conductor cable with steel core up to a diameter of 32 mm in one or two-handed operation
- > Cutters with precision cut and induction hardened cutting edge
- > Two-stage ratchet drive for easy cutting
- > Less physical effort due to very high transmission ratio
- > Fixed handle with support area for putting down the pliers when cutting
- > Locking mechanism for transporting with safely closed handles
- > Special high grade tool steel, multi stage oil-hardened

Steel core

Conductor

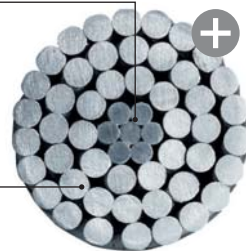

The outer area of these conductor cables consists of light, highly conductive aluminium wires, while the core is made of specially stretch-resistant, galvanised steel wires



Article No.	EAN 4003773-		Ø mm	MCM	↔ mm
95 32 340 SR	081241	MM	32	477	340






## Cable Shears

95  
1

Short design, length only 500 mm

Low weight, high leverage

- > For cutting copper and aluminium single conductors as well as multiple stranded cables
- > Not suitable for steel wire and wire ropes
- > Precision ground, hardened blades
- > Clean and smooth cut without crushing and deformation
- > Low handforce required due to favourable lever ratio and special blade geometry
- > Guard prevents operators' fingers being pinched
- > Adjustable bolted joint
- > Cutter head: vanadium electric steel, forged, oil-hardened
- > Handles: aluminium tube, high-strength

Article No.	EAN 4003773-	 Ø mm	 mm <sup>2</sup>	AWG	 mm
95 12 500	069966	27	150	5/0	500






## Cable Shears (ratchet action)

With telescopic handles

95  
3

- > For cable diameters of up to 38 mm, handles can be positioned at an angle to set the optimum handle width, which makes the shear also suitable for work in confined areas
- > Comfortable work thanks to ratchet action and low weight
- > Heavy duty telescopic handles made of oval aluminium tubing; extendable up to 770 mm for maximum leverage on large cable diameters; retractable down to 570 mm for minimum space requirements during transport
- > Replaceable cutting head
- > Extensive cutting range up to max. Ø 38 mm or max. 280 mm<sup>2</sup> (e.g. 4 x 70 mm<sup>2</sup> NYY) in copper and aluminium cables
- > Easier, neater cut due to optimised cutting-edge geometry
- > Adjustable bolted joint
- > Cutting head: special quality high grade tool steel, oil-hardened
- > Handles: high-strength oval aluminium tubing



Article No.	EAN 4003773-	 Ø mm	 mm <sup>2</sup>	MCM	 mm
95 32 038	071556	38	280	550	570 – 770



## Electricians' Shears

95

Precisely ground blades with fine serration for a clean, non-slip cut  
Cutting edge with integrated cable cutter  
With plastic belt case

- > Universal shears for electricians
- > Handles with multi-component grips, fibreglass-reinforced
- > Cutting edges made from stainless steel, hardness of cutting edges 56 HRC

Article No.	EAN 4003773-	↔ mm
95 05 155 SB	077725	155



## Dismantling Knives

Insulating multi-component handle, VDE-tested

98

5

- > Ergonomically designed handle shape with comfortable slip guard
- > Particularly confident grip thanks to slip-proof soft components
- > Thumb recess and "finger hook" at the end of the handle ensure a good transmission of force when the blade is pulled
- > Transparent protective cap

### 98 53 03

- > Solid, fixed hook blade
- > Suitable for round cables
- > Blade: special tool steel, oil-hardened


### 98 53 13

- > Narrow, fixed hook blade, sickle shaped
- > Suitable for sector cables
- > Blade: special tool steel, oil-hardened

### 98 55

- > Solid, fixed hook blade, sickle shaped
- > With guide shoe at the blade point
- > No damage of the conductor insulation
- > Blade: surgical steel, stainless, vacuum-hardened

Article No.	EAN 4003773-		Blade length mm	↔ mm
98 53 03	026549	⚡ 1000 V	28	170
98 53 13	026556	⚡ 1000 V	50	190
98 55	022558	⚡ 1000 V	38	180

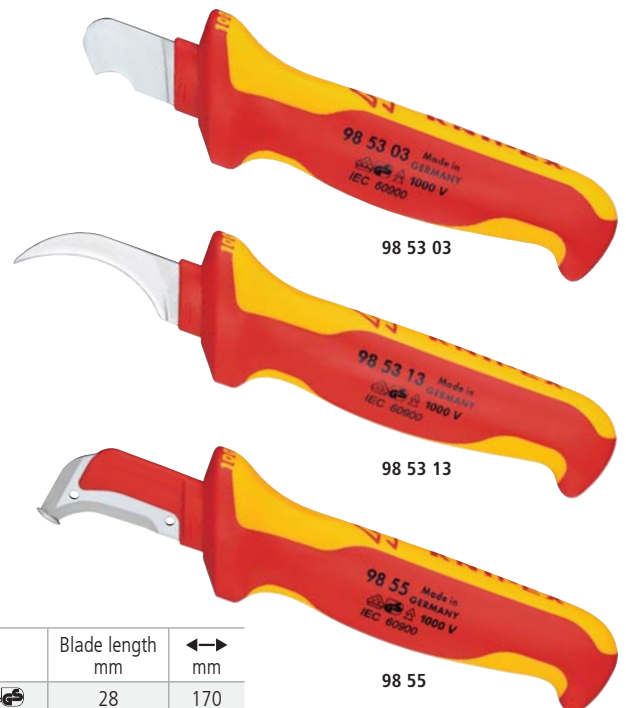

## Cable Knives

Insulating multi-component handle, VDE-tested

98

5

- > Ergonomically improved handle shape with comfortable slip guard
- > Particularly confident grip thanks to slip-proof soft components
- > Thumb recess and "finger hook" at the end of the handle ensure a good transmission of force when the blade is pulled
- > Solid, fixed straight blade
- > Transparent protective cap
- > Blade: special tool steel, oil-hardened

### 98 54

- > Back of the blade plastic coated to avoid short circuits

Article No.	EAN 4003773-		Blade length mm	↔ mm
98 52	035565	⚡ 1000 V	50	190
98 54	026563	⚡ 1000 V	50	190



# **KNIPEX ErgoStrip®** **Universal Dismantling Tool**

16  
 95

For the fast and precise dismantling and stripping of all common round and damp-proof installation cables (e.g. NYM cable 3 x 1.5 mm² up to 5 x 2.5 mm²), data cable (e.g. twisted pair) and coax cable

Innovative, ergonomic pistol grip design for easy cutting, stripping and longitudinal cut of the sheath

- > Conical, slimmed down tool ends for better access in confined areas
- > Stripping device for cross-sections 0.2/0.3/0.8/1.5/2.5/4 mm²
- > Simplified insertion of single wires for stripping using location ridges
- > With opening spring and locking device
- > Easy insertion of coax and data cable thanks to opening aid
- > Multi-component design with a soft plastic zone for comfortable use and a secure grip
- > Housing made from stable glass fibre reinforced plastic



PAT. PEND.

single conductors 0.2–4.0 Ø mm²

data cable CAT 5–7 UTP/STP

all common round and damp-proof installation cables 8–13 Ø mm

coax cable 4.8–7.5 Ø mm

New:  
 ErgoStrip®  
 for left-handers  
 (p. 9)



With concealed cutter in overhanging thumb rest on the side for convenient lengthwise cut



Dismantling of a NYM cable



Wire stripping on single conductors



Stripping of a coax cable



Stripping of a coax cable



Dismantling of a data cable



Article No.	EAN	Stripping capacities				↔ mm
		round cable Ø mm	conductors and strands mm²	data cable	coax cable Ø mm	
16 95 01 SB	4003773-079927	8 - 13	0.2 - 4.0	CAT 5 - 7. Twisted-Pair (UTP/STP)	4.8 - 7.5	135

## Dismantling Tool

16  
30

Universal tool with adjustable cutting depth and three types of cut: round, lengthwise and spiral cut

- > For dismantling round cable sheaths made of PVC, rubber, silicone or PTFE
- > Self-tightening holding lever
- > With knurled nut for cutting depth adjustment



Article No.	EAN 4003773-	Stripping capacities Ø mm	↔ mm
<b>16 30 135 SB</b>	033349	6.0 – 29.0	135
<b>16 30 145 SB</b>	081029	19.0 – 40.0	150

## Dismantling Tool

16  
40

- > For dismantling round cables exceeding 25.0 mm dia.
- > Removes all sheaths of standard cables
- > Suitable for longitudinal and circular cutting
- > Tool body: plastic, fibreglass-reinforced



Article No.	EAN 4003773-	Stripping capacities Ø mm	↔ mm
<b>16 40 150</b>	026709	> 25.0	150

## Dismantling Tools

16  
20

- > For stripping all common round cables
- > Self-tightening holding lever
- > With adjusting screw for cutting depth adjustment
- > Turnable blade for circular and longitudinal cutting
- > Spare blade inside the handle

### 16 20 165 SB

- > With knife and hook blade, protective cap included



16 20 165 SB



16 20 28 SB



16 20 165 SB

Article No.	EAN 4003773-	Stripping capacities Ø mm	↔ mm
<b>16 20 28 SB</b>	060468	8.0 – 28.0	130
<b>16 20 165 SB</b>	043133	8.0 – 28.0	165

## Universal Dismantling Tools

16

- > For dismantling and stripping all common round and damp-proof installation cables between Ø 8.0 – 13.0 mm (e.g. 3 x 1.5 mm<sup>2</sup> up to 5 x 2.5 mm<sup>2</sup>)
- > Body: plastic, fibreglass-reinforced

### 16 85 125 SB

- > With additional blade for longitudinal cuts
- > Telescopic blade inside

### 16 90 130 SB

- > Specially suitable for larger cross-sections and for difficult insulating materials
- > For use in confined and difficult to access work areas
- > No adjustment of blades to cutting depth required
- > Stripping device for conductors and strands 1.5 mm<sup>2</sup> and 2.5 mm<sup>2</sup>



16 85 125 SB



16 90 130 SB



Article No.	EAN 4003773-	Stripping capacities Ø mm	Types of cables	↔ mm
<b>16 80 125 SB</b>	040828	8.0 – 13.0	round cable, e.g.: 3 x 1.5 mm <sup>2</sup> up to 5 x 2.5 mm <sup>2</sup>	125
<b>16 85 125 SB</b>	060444	8.0 – 13.0	round cable, e.g.: 3 x 1.5 mm <sup>2</sup> up to 5 x 2.5 mm <sup>2</sup>	125
<b>16 90 130 SB</b>	076940	8.0 – 13.0	round cable, e.g.: 3 x 1.5 mm <sup>2</sup> up to 5 x 2.5 mm <sup>2</sup>	130

## KNIPEX MultiStrip 10 Automatic Insulation Stripper

12  
42


Stripping without re-adjustment from 0.03 to 10.0 mm<sup>2</sup>

Universal blade geometry - robust and more durable

Ideal grip design with excellent haptics

Recessed wire cutter

- > Fully automatic adjustment to all single-, multi- and fine-stranded conductors with standard insulation throughout the entire capacity range from 0.03 to 10.0 mm<sup>2</sup>
- > No manual fine adjustment necessary
- > No damage to the conductors
- > The clamping jaws made of steel hold the cable in a way that prevents slipping without damaging the remaining insulation
- > With recessed wire cutter for Cu and Al conductors, stranded up to 10 mm<sup>2</sup> and single wire up to 6 mm<sup>2</sup>
- > Particularly smooth-running mechanics and very low weight
- > Replaceable blades block and length stop
- > Handle with soft-plastic zone for a steady grip
- > Body: plastic, fibreglass-reinforced
- > Blade: special tool steel, oil-hardened

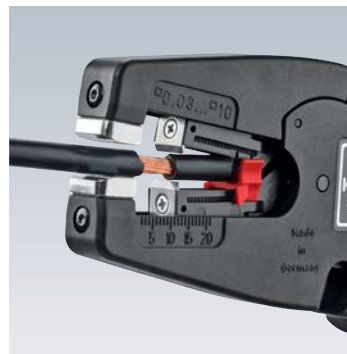

PATENTED

Article No.	EAN		Stripping capacities		↔ mm
			mm <sup>2</sup>	AWG	
12 42 195	054580	MM	0.03 – 10	32 – 7	195

## Automatic Insulation Stripper

12  
64

- > Compact standard tool at a favourable price for all current cable cross-sections and insulating materials
- > For single, multiple and fine stranded cables of 0.2 up to 6 mm<sup>2</sup> with standard insulation
- > Adapts automatically to the respective cable cross-section; prevents damage to the conductor
- > Handy shape and low weight provide high operation comfort
- > Narrow head style for use in confined areas
- > With wire cutter for copper and aluminium wires up to 2.5 mm<sup>2</sup>
- > With adjustable length stop from 6.0 – 18.0 mm for cutting the same stripping lengths during repetitive work



Article No.	EAN		Stripping capacities		↔ mm
			mm <sup>2</sup>	AWG	
12 62 180	054573	MM	0.2 - 6	24 – 10	180

## Self-Adjusting Insulation Strippers

12

- > For single, multiple and fine stranded conductors with plastic or rubber insulation
- > Adapts automatically to the respective cable cross-section; prevents damage to the conductor
- > Cutting depth can be adjusted for different insulation materials
- > With wire cutter for copper and aluminium wires, multiple stranded up to 10 mm<sup>2</sup> and single stranded up to 6 mm<sup>2</sup>
- > Smoothly operating mechanism
- > Stripping blades and clamping jaws easily replaceable
- > Low weight
- > Body: plastic, fibreglass-reinforced
- > Blade: special tool steel, oil-hardened


### 200

- > For thin ribbon cables up to 10.0 mm width in a single pass
- > Adjustable length stop



12 40 200

Article No.	EAN		Stripping capacities		↔ mm
			mm <sup>2</sup>	AWG	
12 40 200	026662	MM	0.03 – 10	32 – 7	200
12 50 200	034407	MM	2.5 – 16	13 – 5	200

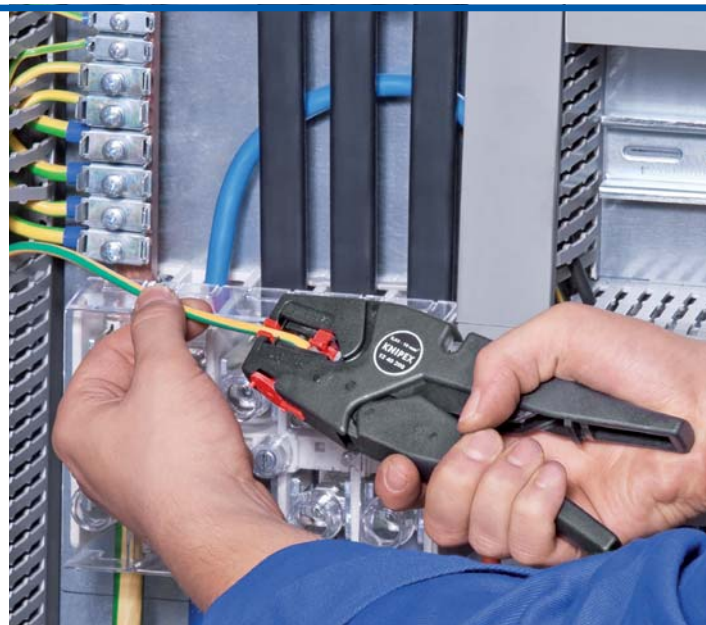

## Automatic Insulation Stripper for flat cable

12

64

- > For PVC insulated flat cables up to a max. 12 mm width and 0.75 mm<sup>2</sup>
- > Adapts automatically to the various conductor heights; prevents damage to the conductor
- > Long stripping lengths possible
- > Blade replaceable
- > Smoothly operating mechanism
- > Low weight
- > Body: plastic, fibreglass-reinforced
- > Blade: special tool steel, oil-hardened



Article No.	EAN		Stripping capacities		↔ mm
			mm <sup>2</sup>	AWG	
12 64 180	073284	MM	0.75 – 2.5	19 – 13	180



## Wire stripping tool for coax and data cable

16  
60

- > Universal stripping tool for coax cables RG 59, RG 6, RG 7, RG 11
- > For stripping outer sheath, shield and insulation in a single process
- > Adjustable stripping blade for data cable
- > Two stripping blades for cutting and stripping telephone ribbon cable (4P/6P/8P) in a single operation
- > Integrated blade for cutting data cables
- > Housing: plastic, impact-proof

Article No.	EAN 4003773-	Cable type	↔ mm
<b>16 60 06 SB</b>	077961	RG 59, RG 6, RG 7, RG 11	125



## Stripping Tool for coax cables

16  
60

- > For dismantling and stripping all common coax cables between Ø 4.8 – 7.5 mm (e.g. for TV- and satellite antenna), also suitable for PVC round cable 3 x 0.75 mm<sup>2</sup>
- > With length scale 5.0 – 20.0 mm
- > Double shell, folding back stripping tool
- > With opening spring and locking device
- > Body: plastic, fibreglass-reinforced



Article No.	EAN 4003773-	Stripping capacities		↔ mm
		Ø mm	mm <sup>2</sup>	
<b>16 60 100 SB</b>	040811	4.8 – 7.5	3 x 0.75	100

## Dismantling Tool for data cables

16  
65

- > For stripping UTP and STP data cables with diameters of 4.5 to 10.0 mm
- > Stripping device for cross-sections 0.2 / 0.3 / 0.8 / 1.5 / 2.5 / 4 mm<sup>2</sup>
- > Body: plastic, fibreglass-reinforced


Article No.	EAN 4003773-	Stripping capacities		↔ mm
		Ø mm	mm <sup>2</sup>	
<b>16 65 125 SB</b>	043157	4.5 – 10.0	0.2 – 4.0	125



## Crimping Pliers

97

- > For cutting cables, stripping wire and crimping insulated and non-insulated terminals, connectors and plug type connectors
- > With threaded holes for cutting copper and brass screws threaded M 2.6/M 3/M 3.5/M 4 and M 5
- > Bolted joint for higher stability and even movement
- > Special steel, high-strength

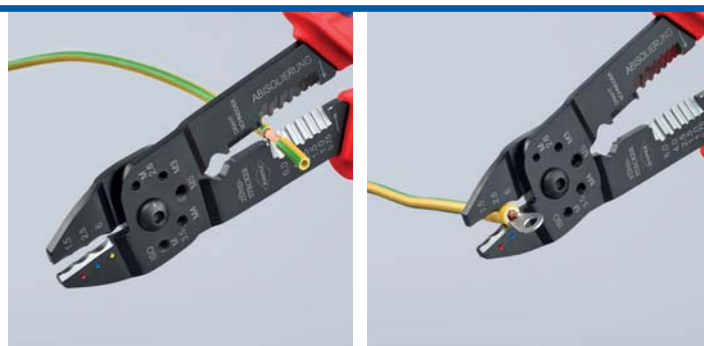

Article No.	EAN 4003773-			Capacity		↔ mm
				mm <sup>2</sup>	AWG	
<b>97 21 215</b>	019688			0.5 – 6.0	20 – 10	230
<b>97 21 215 B</b>	019695			0.5 – 2.5	20 – 13	230
<b>97 21 215 C</b>	019701			0.5 – 6.0	20 – 10	230
<b>97 22 240</b>	070726			0.5 – 6.0	20 – 10	240
				0.5 – 2.5	20 – 13	
<b>97 32 240</b>	079491			0.5 – 6.0	20 – 10	240

- > Repetitive, high crimping quality due to precision dies and integral lock (self-releasing mechanism)
- > Crimping pressure has been set precisely (calibrated) in the factory, re-adjustable
- > Optimum transmission of force thanks to toggle lever for fatigue-reduced operation
- > Good handling thanks to favourable handle position, low weight, compact design and ergonomically shaped handles
- > Chrome vanadium electric steel in special quality, oil-hardened



97 52 36



97 52 38



97 52 36



97 52 38



Article No.	EAN 4003773-			Capacity		↔ mm
				mm²	AWG	
97 52 30	051855			1.5 - 4	15 - 11	220
97 52 33	051862			0.5 - 10	20 - 7	220
97 52 34	051879			0.1 - 2.5	27 - 13	220
97 52 35	051886			0.5 - 6	20 - 10	220
97 52 36	051893			0.5 - 6	20 - 10	220
97 52 37	063193			0.5 - 6	20 - 10	220
97 52 38	051909			0.25 - 6	23 - 10	220
97 52 50	051916					220

## Crimping Pliers for Western plugs

- > Professional tool for cutting and stripping unshielded ribbon telephone cables
- > Exact crimping process due to parallel crimping
- > Repetitive, high crimping quality due to integral lock (self-releasing mechanism)
- > With length cutter and dismantling knife for ribbon cables 6 and 12 mm length
- > With additional stripping device for round cables
- > Chrome vanadium electric steel in special quality, oil-hardened

### 97 51 10

- > For crimping 6- and 8-pole Western plugs type RJ 11/12 (9.65 mm width) and type RJ 45 (11.68 mm width)

### 97 51 12

- > For crimping 4-, 6- and 8-pole Western plugs type RJ 10 (7.65 mm width), type RJ 11/12 (9.65 mm width) and type RJ 45 (11.68 mm width)

Article No.	EAN 4003773-	Applications		↔ mm
97 51 10	043171	6- and 8-pole		190
97 51 12	043188	4-, 6- and 8-pole		200



97 51 12



## KNIPEX MultiCrimp® Crimping Pliers with changer magazine

97

Also for insulated and non-insulated end sleeves (ferrules)  
10 / 16 / 25 mm<sup>2</sup>

Universal indent crimping die for non-insulated connectors

- > Crimping pliers with round magazine and five interchangeable dies
- > Just one tool for the most common crimping applications
- > Crimping dies changed quickly and easily without any additional tool
- > Sorted and protected storage of the interchangeable dies in a round magazine
- > Comfortable, powerful crimping pliers in professional quality
- > Same reliable crimping results as with fixed crimping dies
- > Repetitive, high crimping quality due to precision dies and integral lock



**Compact, inexpensive and light-weight crimping pliers for fitting and repairs. The electrician now only needs one tool instead of five.**



Changing the crimping dies: unlock the magazine position, take out the set of dies which the pliers have been pushed on



Fold in the service lever and press the pliers – ready for use again

Article No.	EAN 4003773-					Capacity mm <sup>2</sup>	AWG	↔ mm
97 33 02	066934			MM	KNIPEX MultiCrimp® non-insulated open plug type connectors (plug width 4.8 + 6.3 mm)	0.5 – 6	20 – 10	250
					insulated terminals, plug connectors and butt connectors	0.5 – 6	20 – 10	
					end sleeves (ferrules)	0.25 – 6	23 – 10	
					end sleeves (ferrules)	10 / 16 / 25	7 / 5 / 3	
					non-insulated crimp terminals, tube and compression cable lugs in accordance with DIN 46234 and DIN 46235 and non-insulated crimp, butt and press connectors in accordance with DIN 46341 and DIN 46267	0.5 – 10	20 – 7	


## Crimping Pliers short design

97

- > Repetitive, high crimping quality due to precision dies and integral lock (self-releasing mechanism)
- > Crimping pressure has been set precisely (calibrated) in the factory, re-adjustable
- > Optimum transmission of force thanks to toggle lever for fatigue-reduced operation
- > Good handling due to 20° angled head, low weight and short design
- > Chrome vanadium electric steel in special quality, oil-hardened

97 59 14

- > Available as accessory: locator for non-insulated open plug-type connectors

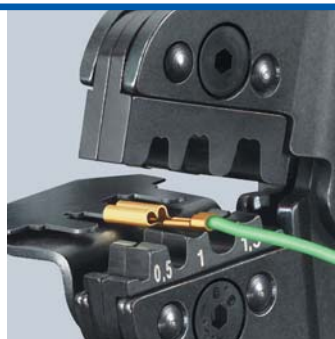

97 52 20

Article No.	EAN 4003773-			Applications	Capacity mm <sup>2</sup>	AWG	↔ mm
97 52 14	026808			non-insulated open plug type connectors (plug width 2.8 + 4.8 mm)	0.1 – 1.5	27 – 16	195
97 52 20	026853			COAX-, BNC- and TNC-connectors			195
97 59 14	026976	Locator for 97 52 14 short design					

## Self-Adjusting Crimping Pliers for end sleeves (ferrules)

With lateral access

97  
53

Square compression now additionally also for end sleeves (ferrules) up to 16 mm<sup>2</sup>

- > Suitable in particular for all twin end sleeves (ferrules) up to 2 x 6 mm<sup>2</sup> or 2 x AWG 8
- > Square compression for ideal contact surfaces in the clamp connection




Crimping capacity can be switched over simply from 10 mm<sup>2</sup> to 16 mm<sup>2</sup>



97 53 04



0,08 - 10 mm<sup>2</sup> + 16 mm<sup>2</sup>

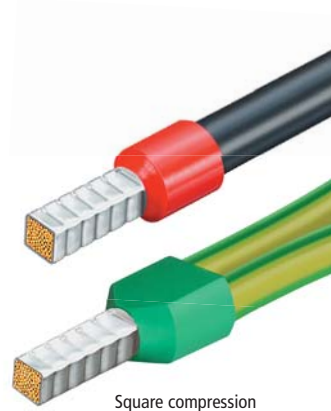

### The small crimping pliers for end sleeves (ferrules) with two major advantages for the user:

Automatic adjustment to the end sleeves used: This makes work easier for the professional and offers reliable and fast crimping.

### Proven functions

- > For crimping end sleeves (ferrules) according to DIN 46228 parts 1 + 4
- > Self-adjusting adaptation to the desired end sleeve (ferrule) size: no wrong crimps caused by using the wrong die
- > Repetitive, high crimping quality due to integral lock (self-releasing mechanism)
- > Tools have been set precisely (calibrated) in the factory
- > Optimum transmission of force thanks to toggle lever for fatigue-reduced operation
- > Handy shape and low weight provide high operation comfort

### Expanded capacity of hexagonal crimping up to 10 mm<sup>2</sup>


- > Suitable in particular for all twin end sleeves (ferrules) up to 2 x 4 mm<sup>2</sup> or 2 x AWG 10
- > Hexagonal compression for confined connection dimensions



97 53 14



0,08 - 10 mm<sup>2</sup>

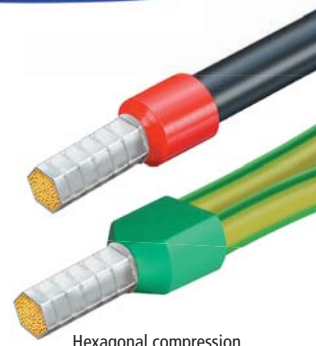

Article No.	EAN			Pliers	Handles	Application	Capacity mm <sup>2</sup>	AWG	↔ mm
97 53 04	028017			burnished	with multi-component grips	End Sleeves (ferrules)	0,08 - 10 + 16	28 - 5	180
97 53 14	041474			burnished	with multi-component grips	End Sleeves (ferrules)	0,08 - 10	28 - 7	180

# Self-Adjusting Crimping Pliers for end sleeves (ferrules)

With front loading

97  
53

- > For crimping end sleeves (ferrules) according to DIN 46228 parts 1 + 4
- > Self-adjusting adaptation to the desired end sleeve (ferrule) size: no wrong crimps caused by using the wrong die
- > Front loading of the end sleeves (ferrules) into the tool
- > Repetitive, high crimping quality due to integral lock (self-releasing mechanism)
- > Crimping pressure has been set precisely (calibrated) in the factory, re-adjustable
- > Optimum transmission of force thanks to toggle lever for fatigue-reduced operation
- > Handy shape and low weight provide high operation comfort
- > Chrome vanadium electric steel in special quality, oil-hardened

## 97 53 08

- > Compression from 0.08 – 10.0 mm<sup>2</sup> in one profile
- > End sleeves (ferrules) up to 2.5 mm<sup>2</sup> can also be loaded parallelly from the side
- > Suitable in particular for all twin end sleeves (ferrules) up to 2 x 4 mm<sup>2</sup> or 2 x AWG 10

## 97 53 09

- > Compression from 0.08 – 10.0 and 16.0 mm<sup>2</sup> in one profile
- > With selector lever for setting the crimping area either to 0.08 – 10 mm<sup>2</sup> or 16 mm<sup>2</sup>
- > Suitable in particular for all twin end sleeves (ferrules) up to 2 x 6 mm<sup>2</sup> or 2 x AWG 8




97 53 08




97 53 09




Square compression

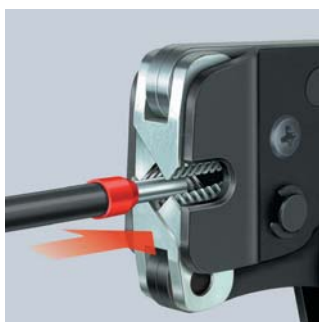

Front loading of end sleeves (ferrules)  
e.g. in switchboards

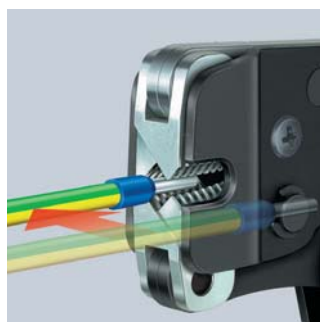

97 53 08: lateral loading of end sleeves  
(ferrules) up to 2.5 mm<sup>2</sup> parallelly from the  
side e.g. in confined areas

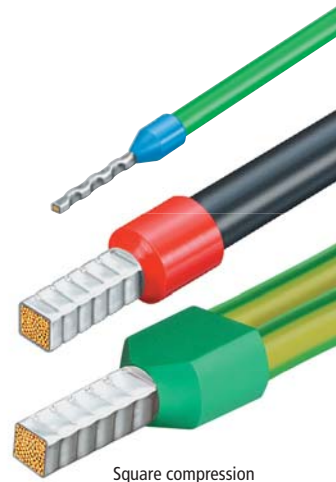

Square compression



## The crimping pliers for end sleeves (ferrules) with three great advantages for the user:

- > Automatic self-adjustment to the end sleeve (ferrule) used: this allows the specialist to work with less strain and enables secure, reliable and quick crimping
- > Range of applications also for large cross-sections: square crimping 0.08 to 10.0 + 16.0 mm<sup>2</sup>
- > Front loading: very helpful under difficult working conditions in confined areas.

Article No.	EAN			Pliers	Handles	Applications	Capacity mm <sup>2</sup>	AWG	↔ mm
97 53 08	4003773-040187			burnished	with multi-component grips	end sleeves (ferrules)	0.08 - 10	28 - 7	190
97 53 09	044550			burnished	with multi-component grips	end sleeves (ferrules)	0.08 - 10 + 16	28 - 5	190

## Crimping Pliers for end sleeves (ferrules) 97


- > For crimping end sleeves (ferrules) according to DIN 46228 parts 1 + 4 in the range from 0.25 up to 2.5 mm<sup>2</sup>
- > Crimping in marked trapezoidal dies for reliable connections between the sleeve and the conductor
- > Vanadium electric steel; forged, oil-hardened



97 61 145 A



Article No.	EAN 4003773-		Capacity mm²	AWG	Number of crimping positions	↔ mm
97 61 145 A	035558		0.25 – 2.5	23 – 13	4	145
97 62 145 A	060154		0.25 – 2.5	23 – 13	4	145
97 68 145 A	071754	1000 V	0.25 – 2.5	23 – 13	4	145

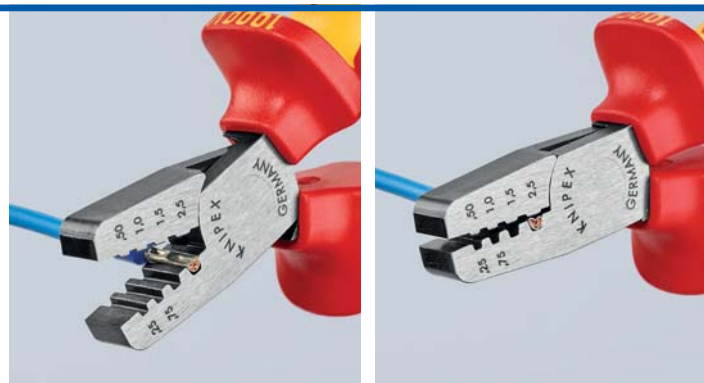

97 68 145 A



## Crimping Pliers For end sleeves (ferrules)

97  
7

Easy crimping due to optimised transmission ratio  
Light and slim design

- > For crimping end sleeves (ferrules) according to DIN 46228 parts 1 + 4 from 0.25 to 16 mm<sup>2</sup>
- > Crimping in marked half-round dies for reliable connections between the sleeve and the conductor
- > 9 particularly deep dies with conical side faces



97 78 180



Article No.	EAN 4003773-			Capacity		Number of crimping positions	↔ mm
				mm²	AWG		
97 71 180	040668			0.25 – 16	23 – 5	9	180
97 72 180	060185			0.25 – 16	23 – 5	9	180
97 78 180	072003	1000 V		0.25 – 16	23 – 5	9	180
97 78 180 T	081531			0.25 – 16	23 – 5	9	180



## Crimp System Pliers for exchangeable crimping dies

97  
43

- > Just one tool for almost 1000 crimping applications
- > Almost parallel crimping die movement
- > Repetitive, high crimping quality due to precision dies and integral lock (self-releasing mechanism)
- > Crimping pressure has been set precisely (calibrated) in the factory, re-adjustable
- > Optimum transmission of force due to lever action for fatigue-reduced operation
- > Ergonomically designed handles
- > Different locators for precise positioning of the connectors
- > Crimping dies for applications not covered in the range offered here, may be available on request
- > Chrome vanadium electric steel in special quality, oil-hardened

### 97 43 200

- > Comes in a plastic case; foam insert with recesses for crimping dies and locators; with service tool (Allen key), screws and nuts
- > Without crimping dies

### 97 43 200 A







- > Pliers without crimping dies, without case

### 97 43 05

- > With attached crimping dies for non-insulated open plug-type connectors (4.8 and 6.3 mm connector width)

### 97 43 06

- > With attached crimping dies for insulated terminals and plug connectors

Article No.	EAN	Applications	Capacity		↔ mm
			mm <sup>2</sup>	AWG	
97 43 200 A	071587	Crimp System Pliers for exchangeable crimping dies*			200
97 43 200	030812	Crimp System Pliers, comes in a plastic case			200
97 43 05	031031	  	0.5 – 6	20 – 10	200
97 43 06	031048	  	0.5 – 6	20 – 10	200

\* Special profiles on request [www.knipex.com](http://www.knipex.com)



PATENTED

97 43 200 A



## KNIPEX eCrimp

97

The KNIPEX eCrimp is the first electromechanically actuated model of crimping pliers for comfortable and reliable crimping of non-insulated terminals up to 25 mm<sup>2</sup> and end sleeves (ferrules) up to 50 mm<sup>2</sup>.

- > Strong electromechanical drive, no hydraulic components, no leakages
- > Possible use of over 40 KNIPEX crimping dies and locators as well as more than 1000 special crimping dies from the proven Crimp System Pliers (97 43 200)
- > Ergonomically optimised, user-friendly working height during workshop operation
- > Low noise level
- > Powerful li-ion rechargeable battery (12 V; 1.5 Ah; 18 Wh); charge time approx. 30 min; no memory effect
- > Approx. 170 operating cycles for plug-in connectors with 10 mm<sup>2</sup> nominal size with a single battery charge
- > Tether attachment point to prevent falling during field work

Article No.	EAN	Mains voltage/frequency	Connector socket
97 43 E	076858	230 V / 50 Hz	CEE 7/16



### Long servicing intervals (up to 25.000 crimping actions)!

The KNIPEX eCrimp is designed to only require servicing after 25.000 crimping actions. This means the intervals between servicing the electromechanical crimping pliers is 2.5 : 1 in relation to conventionally actuated crimping pliers.

The pliers are therefore available for crimping use for considerably longer. They do not need to be sent away frequently for servicing. High availability without downtimes while being serviced.

# Crimping Dies

For Crimp System Pliers; for different applications; 1,000 special crimping dies upon request

97

Article No.	EAN 4003773-			Applications	Capacity mm <sup>2</sup>	AWG	Capacity SW mm	Sleeves Ø mm	Number of crimping positions
97 49 04	030850			non-insulated open plug type connectors (plug width 2.8 + 4.8 mm)	0.1 – 2.5	27 – 13			4
97 49 05	030867			non-insulated open plug type connectors (plug width 4.8 + 6.3 mm)	0.5 – 6	20 – 10			3
97 49 06	030836			insulated terminals, plug connectors + butt connectors	0.5 – 6	20 – 10			3
97 49 08	030874			insulated and non-insulated end sleeves (ferrules)	0.25 – 6	23 – 10			5
97 49 09	030881			insulated and non-insulated end sleeves (ferrules)	10 / 16 / 25	7 / 5 / 3			3
97 49 10	076896			non-insulated tubular cable lugs and crimp terminals in accordance with DIN 46237 and non-insulated butt and crimp connectors in accordance with DIN 46341	0.75 / 1.5 / 2.5	13 / 15-17 / 19-20			3
97 49 11	076902			non-insulated crimp terminals, tube and compression cable lugs in accordance with DIN 46234 and DIN 46235 and non-insulated crimp, butt and press connectors in accordance with DIN 46341 and DIN 46267	4 / 6 / 10	7 / 10 / 11			3
97 49 14	077756			for non-insulated crimp terminals, tube and compression cable lugs in accordance with DIN 46234 and DIN 46235 and non-insulated crimp, butt and press connectors in accordance with DIN 46341 and DIN 46267	0.5 – 10	20 – 7			4
97 49 15	043164			lug connectors and non-insulated open plug type connectors (plug width 6.3 mm)	1.25 – 2.5 + 3 – 6	17 – 13 / 17 – 10			2 + 1
97 49 16	040675			insulated terminals + cable connectors	10 – 16	7 / 5			2
97 49 18	063186			Twin end sleeves (ferrules) for two flexible conductors	2 x 6 / 2 x 10 / 2 x 16	2 x 10 / 2 x 7 / 2 x 5			3
97 49 19	030898			insulated and non-insulated end sleeves (ferrules)	35 – 50	2 / 0			2
97 49 20	045069			F-connectors for TV and satellite connections			7.0 / 8.4 / 8.1	7.7 / 9.5 / 9.5	3
97 49 23	052135			non-insulated terminals + cable connectors	16 + 25	5 + 3			2
97 49 24	030911			D Sub; HD 20; HDE plug	0.03 – 0.56	32 – 20			3
97 49 30	030904			non-insulated crimp connectors in accordance with DIN 46267	1.5 – 4	15 – 11			3
97 49 35	034315			spark plug connectors and distributors	1	17			5
97 49 40	030959			Coax connectors RG 58. 59. 62. 71. 223			5.4 / 6.48 / 1.72	6.4 / 7.6 / 2.1	3
97 49 44	041443			rolled contacts	0.14 – 1.5	26 – 15			3
97 49 50	030966			Coax connectors/ car phone RG 58. 74. 188. 316			3.25 / 4.52 / 5.41 / 1.72 / 1.07 / 0.72	3.9 / 5.4 / 6.4 / 2.1 / 1.3 / 0.95	6
97 49 54	041450			modular plugs	0.5 – 2.5	20 – 13			4
97 49 59	073734			solar cable connectors Helios H4 (Amphenol)	2.5 + 4 + 6	13 – 10			3
97 49 60	030928			turned contacts (HTS + Harting)	0.14 – 4	26 – 11			4
97 49 61	045137			turned contacts	1.5 / 2.5 / 4 / 6	10 / 11 / 13 / 15			4
97 49 62	063179			solar cable connectors (Huber + Suhner)	2.5 + 4	13 + 11			3
97 49 63	066675			solar cable connectors (Huber + Suhner)	4 + 6	11 + 10			3
97 49 64	044055			ABS connectors in motor vehicles	1 – 6	17 – 10			2
97 49 65	066682			solar cable connectors MC3 (Multi-Contact)	2.5 – 6	13 – 10			3
97 49 66	066699			solar cable connectors MC4 (Multi-Contact)	2.5 – 6	13 – 10			3
97 49 66 4	072096			solar cable connectors MC4 (Multi-Contact) cutting - stripping - crimping	4	11			1
97 49 66 6	072102			solar cable connectors MC4 (Multi-Contact) cutting - stripping - crimping	6	10			1
97 49 67	066705			solar cable connectors (Hirschmann)	2.5 – 6	13 – 10			3
97 49 68	066712			solar cable connectors (Tyco)	1.5 – 6	15 – 10			4
97 49 69 1	072119			solar cable connectors gesis® solar PST 40 (Wieland)	1.5 – 2.5	15 + 13			2
97 49 69 2	072126			solar cable connectors gesis® solar PST 40 (Wieland)	4 – 10	11 – 7			3
97 49 70	030942			Western plugs	4 / 6 / 8-poles RJ 10/11/12/45				3
97 49 72	076957			solar cable connectors MC3 (Multi-Contact)		7 / 10 / 11			3

## Four-Mandrel Crimping Pliers

For turned contacts

97  
7

- > For crimping turned contacts
- > Four-mandrel crimping for top-quality crimping connections
- > Mandrel gauge to check the basic setting
- > Fine adjustment of pressure depending on the conductor's diameter by means of adjusting wheel
- > Repetitive, high crimping quality due to integral lock (self-releasing mechanism)
- > Optimum transmission of force due to highly effective lever action for fatigue-reduced operation
- > High operation comfort thanks to handy shape
- > Chrome vanadium electric steel in special quality, oil-hardened

Article No.	EAN 4003773-	Applications	Capacity mm <sup>2</sup>	↔ mm
<b>97 52 65</b>	045236	turned contacts (Harting; Ilme; Phoenix; Amphenol; Walther; HTS; Contact; Weidmüller)	0.14 – 6	230
<b>97 59 65 2</b>	071600	Universal Locator for 97 52 65 / 97 52 65 A / 97 52 65 DG / 97 52 65 DG A		



## Compression Tool

For coax connectors

97  
40

For crimping F, BNC and RCA connectors

Robust design

- > Suitable for RG 59/6/11 cable
- > Rotatable head for different cable sizes
- > Rotatable insert for various types of connector
- > Adjusting screw for various connector lengths
- > Applicable among others for compression connectors Kathrein EMK 12; Cablecon F-56 CX3 5.1; Astro FKS 06

Article No.	EAN 4003773-	Applications	↔ mm
<b>97 40 20 SB</b>	077626	for F, BNC and RCA connectors	175



## Insertion tool

For LSA-Plus and identical construction design

97

- > Tool for putting on boards, sockets and fields
- > Pushing down and cutting in one operation
- > For UTP and STP cables, conductor 0.4 – 0.8 mm dia.
- > With integrated pulling hook and release blade
- > Housing: plastic, impact-proof

Article No.	EAN 4003773-	Applications	Capacity Ø mm	↔ mm
<b>97 40 10</b>	044895	UTP- and STP-cables, LSA-Plus and identical	0.4 – 0.8	175



## Pipe Cutter

For plastic conduit pipes and hoses

90  
2

- > For cutting thin walled plastic pipes (conduit plastic pipes) and flexible hoses, also with fabric reinforcement, of plastic and rubber up to 25.0 mm/1" exterior dia.
- > Not suitable for cutting cables
- > With opening spring and locking device
- > Tool body: plastic, fibreglass-reinforced
- > Blades: special tool steel, oil-hardened, interchangeable



Article No.	EAN		Cutting capacity Ø mm	↔ mm
90 20 185	4003773-067122	MM	25	185



## Pipe Cutter

For plastic conduit pipes

94  
10

- > For clean cutting of plastic pipes (e.g. plastic conduit pipes) with 6.0 – 35.0 mm dia.
- > Not suitable for cutting cables
- > Blade is replaceable and can be retracted from any position
- > Low force requirement due to special blade geometry and optimum transmission
- > Minimum operator fatigue due to ergonomic handle design and incremental ratchet blade feed
- > Housing: die-cast aluminium, red lacquered
- > Blade: special tool steel, oil-hardened

Article No.	EAN		Cutting capacity Ø mm	Cutting edge length mm	↔ mm
94 10 185	4003773-047025	MM	6 – 35	35	185



## Vinyl Shears

Also for cable ducts

95  
02

- > For cutting and shortening cable ducts, also for plastic material up to 4.0 mm thickness
- > Special lever transmission
- > Very effective blade geometry
- > Tool body: high-grade chrome vanadium electric steel, oil-hardened

Article No.	EAN		Cutting capacities mm	Cutting capacity mm	↔ mm
95 02 21	4003773-052128	MM	110	max. 4	275



PATENTED

## Notching Pliers

90

- > Special pliers for notching recesses into plastic ledges and plastic casings for electric and sanitary installation
- > Notches can be enlarged by initial and final cut
- > Clean cut edges – no trimming activities needed
- > With opening spring, opening limiter and locking lever

Article No.	EAN		Capacity mm	↔ mm
90 61 20	4003773-051954	MM	20 x 29	250



PATENTED

> Tools in a plastic deep-drawn tray with transparent lid



00 20 12 V01



00 20 12 V02



00 20 12 V03



00 20 12 V04



00 20 12 V05



Article No.	EAN				Quantity	Nominal size
00 20 12 V01	4003773-075523			Screwdriver Set		
		1000 V	98 20 30	Screwdrivers for slotted screws	1	3.0 mm
			98 20 40		1	4.0 mm
			98 20 55		1	5.5 mm x 125 mm
			98 20 65		1	6.5 mm
		1000 V	98 24 01	Screwdriver for cross recessed screws, Phillips®	1	PH 1
			98 24 02		1	PH 2
00 20 12 V02	082538			VDE Screwdriver Set Slotted / Phillips®		
		1000 V	98 20 30	Screwdrivers for slotted screws	1	3.0 mm
			98 20 40 SL		1	4.0 mm
			98 20 55 SL	Screwdriver (Slim) for slotted screws	1	5.5 mm x 125 mm
			98 20 65 SL		1	6.5 mm
		1000 V	98 24 01 SL	Screwdriver (Slim) for cross-recessed screws, Phillips®	1	PH 1
			98 24 02 SL		1	PH 2
00 20 12 V03	082545			VDE Screwdriver Set Phillips® / Pozidriv®		
			98 24 00	Screwdriver for cross recessed screws, Phillips®	1	3.0 mm
			98 24 01 SL		1	4.0 mm
		1000 V	98 24 02 SL	Screwdriver (Slim) for cross-recessed screws, Phillips®	1	5.5 mm x 125 mm
			98 25 00		1	6.5 mm
			98 25 01 SL	Screwdriver (Slim) for cross-recessed screws, Pozidriv®	1	PH 1
			98 25 02 SL		1	PH 2
00 20 12 V04	082552			VDE Screwdriver Set Slotted / Phillips® / Pozidriv®		
		1000 V	98 20 40 SL	Screwdrivers for slotted screws	1	4.0 mm
			98 24 01 SL		1	PH1
		1000 V	98 24 02 SL	Screwdriver (Slim) for cross-recessed screws, Phillips®	1	PH2
			98 25 01 SL		1	PZ1
		1000 V	98 25 02 SL	Screwdriver (Slim) for cross-recessed screws, Pozidriv®	1	PZ2
00 20 12 V05w	082569			VDE Screwdriver Set Slotted / Phillips® / Pozidriv®		
		1000 V	98 20 25	Screwdrivers for slotted screws	1	2.5 mm
			98 20 40 SL		1	4.0 mm
		1000 V	98 24 01 SLS	Screwdriver (Slim) for cross-recessed screws, Phillips®	1	PH1
			98 24 02 SLS		1	PH2
		1000 V	98 25 01 SLS	Screwdriver (Slim) for cross-recessed screws, Pozidriv®	1	PZ1
			98 25 02 SLS		1	PZ2

## Wire Rope Cutters (forged)

95

- > With two crimping dies for end caps on Bowden cable sheaths and end ferrules for traction cables
- > Comfortable work thanks to handy, slim design and internal opening spring
- > Bolted joint for precise blade guidance, re-adjustable
- > High leverage for reduced effort
- > Cutting-edge hardness approx. 64 HRC
- > Chrome vanadium heavy-duty steel, forged, multi stage oil-hardened



Article No.	EAN 4003773-	Ø mm	Ø mm	Ø mm	Ø mm	mm
95 61 190	040651	7.0	5.0	4.0	2.5	190

## KNIPEX CoBolt® Compact Bolt Cutters

71

Micro-structured cutting edge allows easy cutting of large cross-sections

With gripping surface below the joint for gripping and pulling wires with a diameter as from 1.0 mm

- > Precision cutting edges for soft and hard wire as well as piano wire
- > Cuts bolts, nails, rivets, etc. up to 5.2 mm dia.
- > Most efficient joint design ensures exceptional cutting performance
- > Cutting edges additionally induction hardened, cutting edge hardness approx. 64 HRC
- > Opening spring and locking device are integrated in the handles also for comfortable work and protected transport
- > Chrome vanadium heavy-duty steel, forged, multi stage oil-hardened



71 01 200

**New:**  
KNIPEX CoBolt® S  
(p. 10)



71 01 / 02 / 12 200  
Micro-structured cutting edge



71 01 / 02 / 12 and 71 32 200  
Gripping surface below the joint



Article No.	EAN 4003773-		Ø mm	Ø mm	Ø mm	Ø mm	mm
71 01 200	033165		6.0	5.2	4.0	3.6	200
71 02 200	047056		6.0	5.2	4.0	3.6	200
71 12 200	066859	///	6.0	5.2	4.0	3.6	200
71 32 200	066880	///	6.0	5.2	4.0	3.6	200

## Pen-Style Control Cabinet Key

For all standard cabinets and shut-off systems

00

- > Easy to carry pen-style control cabinet key with fastening clip
- > Four different key profiles can be utilised by swivelling the key holder
- > For control cabinets and shut-off systems in the supply of gas, water and electricity
- > For technical installations in buildings, e.g. air conditioning and ventilation systems, shut-off valves, mains switchboards, etc.
- > Universal 1/4" bit adapter for standard bits (permanent magnet for retaining)
- > Additional bit adapter for 1/4" bits inside one key profile
- > With 2 reversible bits: cross recess PH / slot 7.0 x 1.2 mm and TX20 / TX25

00 11 17

- > Contactless detection of alternating current with optical indication (red LED); range of voltage 50 - 600 V; frequency range 50 - 60 Hz
- > Contactless detection of magnetic fields with optical indication (green LED)
- > Battery saving automatic switch-off
- > With a reversible bit: cross recess PH / slot 7.0 x 1.2 mm









00 11 17


Article No.	EAN 4003773-	mm	mm	Ø mm	mm
00 11 07	063018	5 / 6 / 8	9	3 - 5	145
00 11 17	068396	6 / 8	9	3 - 5	155

## Control Cabinet Keys

00

- > For control cabinets and shut-off systems in the supply of gas, water and electricity
- > For technical installations in buildings, e.g. air conditioning and ventilation systems, shut-off valves, mains switchboards, etc.
- > With bit insert: slot 1.0 x 7 mm and cross recess PH2 (00 11 03 + 00 11 04)

Article No.	EAN 4003773-	 mm	 mm	 Ø mm	 mm	 mm	 mm
<b>00 11 03</b>	041658	5 / 6 / 8	9	3 – 5	–	–	76
<b>00 11 04</b>	048954	5 / 7 / 8	9 – 10	–	–	6 / 7 / 8 / 9	90
<b>00 11 06</b>	071334	5 / 6 / 7 – 8 / 9 – 10	7 / 8 – 9 / 10 – 11	3 – 5	6	–	90

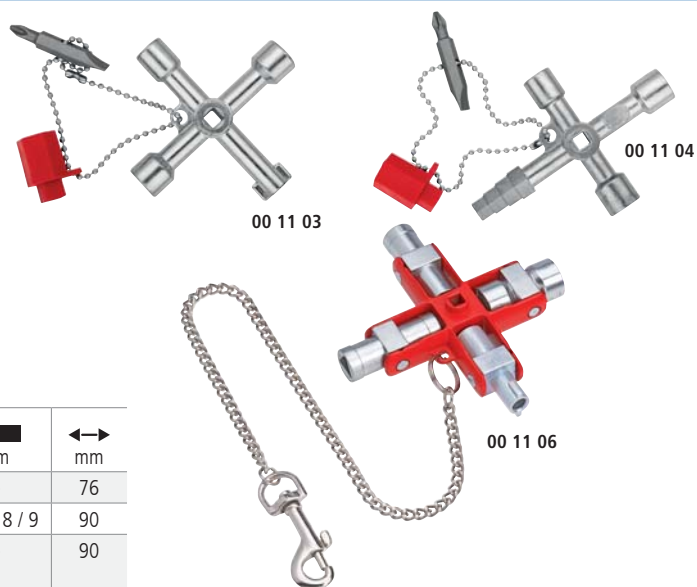

## KNIPEX TwinKey®

For all standard cabinets and shut-off systems



00

1

10 profiles. 2 crosses. 1 key.

All common locking systems

- > Multifunctional key for the actuation of locking systems from the areas of facilities engineering (heating and sanitation, air conditioning, electro technology), gas and water supply and shut-off-systems
- > 8-arm version: two 4-way spider keys connected in a space-saving way using magnets
- > Reversible bit: 1.0 x 7 mm slot and PH2 cross slot
- > Key and reversible bit joined by stable stainless steel wire
- > Weight-optimised zinc die-cast design

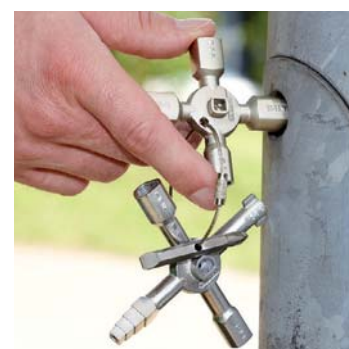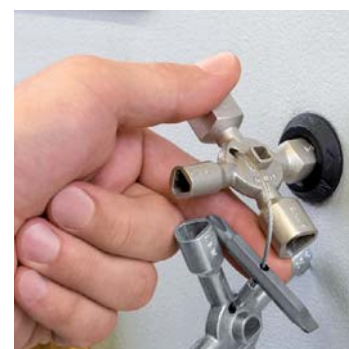

Article No.	EAN 4003773-	 mm	 mm	 Ø mm	 mm	 mm	 mm
<b>00 11 01</b>	074670	5 / 6 – 7 / 8 – 9 / 10 – 11	7 – 8 / 9 – 10 / 11 – 12	3 – 5	6	6 – 9	92

# Crimp Assortments

For end sleeves (ferrules)

97

- > In a TANOS MINI-systainer® (solid plastic box)
- > T-Loc fastener for one-handed operation: open or close the systainer® with one turn and connect to a second systainer®
- > Opening when connected: fast and simple access to content without disconnecting
- > Two stackable plastic inserts with 6 trays each for connectors
- > With an assortment of end sleeves (ferrules) with/without collar.



97 90 05



97 90 06

## 97 90 05

- > With Crimping Pliers for end sleeves 97 71 180

## 97 90 06

- > With Crimping Pliers for end sleeves 97 71 180

## 97 90 09

- > With Self-Adjusting Crimping Pliers for end sleeves (ferrules) 97 53 04

## 97 90 10

- > With Self-Adjusting Insulation Stripper 200 ; with Self-Adjusting Crimping Pliers for end sleeves (ferrules) 97 53 04

## 97 90 12

- > With Self-Adjusting Insulation Stripper 200; with Self-Adjusting Crimping Pliers for end sleeves (ferrules) 97 53 08

## 97 90 23

- > With Crimping Pliers "PreciForce" for end sleeves (ferrules) 97 52 38

## 97 90 24

- > With Self-Adapting Universal Insulation Stripper "Multistrip 10" 12 42 195
- > With Self-Adjusting Crimping Pliers for end sleeves (ferrules) 97 53 08



97 90 09



97 90 10



97 90 12



97 90 23



97 90 24



Several boxes can be connected with each other

Article No.	EAN 4003773-	Pliers		200 x mm <sup>2</sup>	150 x mm <sup>2</sup>	100 x mm <sup>2</sup>	75 x mm <sup>2</sup>	50 x mm <sup>2</sup>	40 x mm <sup>2</sup>
97 90 05	025535	97 71 180		0.5 / 0.75 / 1 / 1.5 / 2.5	4 / 6			10 / 16	
97 90 06	025542	97 71 180		0.5 / 0.75 / 1 / 1.5	2.5		4 / 6	10	16
97 90 09	028574	97 53 04		0.5 / 0.75 / 1 / 1.5 / 2.5		4 / 6		10	
97 90 10	046202	97 53 04 / 200		0.5 / 0.75 / 1 / 1.5 / 2.5		4 / 6		10	
97 90 12	048916	97 53 08 / 200		0.5 / 0.75 / 1 / 1.5 / 2.5		4 / 6		10	
97 90 23	062158	97 52 38		0.5 / 0.75 / 1 / 1.5 / 2.5		4 / 6			
97 90 24	062394	97 53 08 / 12 42 195		0.5 / 0.75 / 1 / 1.5 / 2.5		4 / 6		10	
97 90 00 LE	054009	TANOS MINI-systainer® empty							

## 97 90 00

> With crimping pliers 97 00 215 A

## 97 90 21

> With Crimping Pliers PreciForce® 97 52 36 (for insulated terminals and plug connectors)

## 97 90 22

> With Self-Adapting Universal Insulation Stripper "Multistrip 10" 12 42 195

> With Crimping Pliers PreciForce® 97 52 36 (for insulated terminals and plug connectors)

## 97 90 25

> With crimping pliers 97 22 240

## 97 90 26

> With crimping pliers 97 32 240



Article No.	EAN 4003773-			Cable connectors	Quantity	Cable mm²
97 90 00	025375			Blade Terminal Sockets, 6.3 x 0.8 mm	25	4 – 6
					25	1.5 – 2.5
					25	0.5 – 1
				Round Sockets, Ø 4 mm	25	0.5 – 1
				Cable Connectors, eye type, Ø 4 mm	25	0.5 – 1
					25	1.5 – 2.5
				Cable Connectors, eye type, Ø 5 mm	25	1.5 – 2.5
					25	4 – 6
				Cable Connectors, eye type, Ø 6 mm	25	4 – 6
				Butt Connectors, insulated, Red	25	0.5 – 1
				Butt Connectors, insulated, Blue	25	1.5 – 2.5
				Round Pin Plugs, Ø 4 mm	25	0.5 – 1
97 90 21	062134			Blade Terminal Sockets, 6.3 x 0.8 mm	25	0.5 – 1
					25	1.5 – 2.5
				Cable Connectors, eye type, Ø 4 mm	25	0.5 – 1
				Cable Connectors, eye type, Ø 5 mm	25	0.5 – 1
				Cable Connectors, eye type, Ø 6 mm	25	4 – 6
				Cable Connectors, eye type, Ø 8 mm	25	4 – 6
				Cable Connectors, eye type, Ø 4 mm	25	1.5 – 2.5
				Cable Connectors, eye type, Ø 5 mm	25	1.5 – 2.5
				Cable Connectors, eye type, Ø 6 mm	25	1.5 – 2.5
				Butt Connectors, insulated, Red	25	0.5 – 1
				Butt Connectors, insulated, Yellow	25	4 – 6
				Butt Connectors, insulated, Blue	25	1.5 – 2.5
97 90 22	062141			Blade Terminal Sockets, 6.3 x 0.8 mm	25	0.5 – 1
					25	1.5 – 2.5
				Cable Connectors, eye type, Ø 4 mm	25	0.5 – 1
				Cable Connectors, eye type, Ø 5 mm	25	0.5 – 1
				Cable Connectors, eye type, Ø 4 mm	25	1.5 – 2.5
				Cable Connectors, eye type, Ø 5 mm	25	1.5 – 2.5
				Cable Connectors, eye type, Ø 6 mm	25	1.5 – 2.5
					25	4 – 6
				Cable Connectors, eye type, Ø 8 mm	25	4 – 6
				Butt Connectors, insulated, Red	25	0.5 – 1
				Butt Connectors, insulated, Blue	25	1.5 – 2.5
				Butt Connectors, insulated, Yellow	25	4 – 6

## Crimp Assortments

For cable connectors

97

Article No.	EAN 4003773-			Cable connectors	Quantity	Cable mm <sup>2</sup>
97 90 25	076971			Non-Insulated Blade Terminal Sockets, 6.3 x 0.8 mm	25	0.5 – 1.5
					25	1 – 2.5
				Blade Terminal Sockets, 6.3 x 0.8 mm	25	0.5 – 1
					25	1.5 – 2.5
					25	4 – 6
				Blade Terminal Plugs, 6.3 x 0.8 mm	25	0.5 – 1
					25	1.5 – 2.5
				Cable Connectors, eye type, Ø 4 mm	25	0.5 – 1
					25	1.5 – 2.5
				Butt Connectors, insulated, Red	25	0.5 – 1
97 90 26	079521			Blade Terminal Sockets, 6.3 x 0.8 mm	25	1.5 – 2.5
					25	4 – 6
					25	0.5 – 1
				Cable Connectors, eye type, Ø 4 mm	25	0.5 – 1
					25	1.5 – 2.5
				Cable Connectors, eye type, Ø 5 mm	25	1.5 – 2.5
					25	4 – 6
				Cable Connectors, eye type, Ø 6 mm	25	4 – 6
				Butt Connectors, insulated, Red	25	0.5 – 1
				Butt Connectors, insulated, Blue	25	1.5 – 2.5
97 90 00 LE	054009	TANOS MINI-systainer® empty		Round Sockets, Ø 4 mm	25	0.5 – 1
				Round Pin Plugs, Ø 4 mm	25	0.5 – 1

## Tool Case for Photovoltaics

97  
9

- > With tools for photovoltaics
- > Without crimping dies – please order separately (see ref. 97 49) for individual assortment
- > With service tools (hexagonal key) for the change of crimping dies
- > Shock-resistant plastic case
- > Foam insert with recesses for tools, crimping dies and locators
- > Dimensions, exterior (W x H x D): 345 x 80 x 280 mm



Huber + Suhner  
Multi-Contact  
Hirschmann  
Tyco  
Wieland



Supplied without crimp inserts  
and locators

Article No.	EAN 4003773-	Content
97 91 01	070351	12 12 11 Precision Insulation Stripper 95 16 165 Cable Shears 97 43 200 Crimp System Pliers

Additional Crimping dies: [www.knipex.com](http://www.knipex.com)

Article No.	EAN 4003773-	Content
<b>98 99 11</b>	026624	1 x 03 07 200 / 1 x 70 07 160 / 1 x 98 20 35 / 1 x 98 20 40 / 1 x 98 20 55 / 1 x 98 24 00 / 1 x 98 42 / 1 x 98 45 125 / 1 x 98 45 250 / 1 x 98 47 10 / 1 x 98 47 11 / 1 x 98 47 12 / 1 x 98 47 13 / 1 x 98 47 14 / 1 x 98 47 17 / 1 x 98 47 19 / 1 x 98 52

Article No.	EAN 4003773-	Content
<b>98 99 12</b>	026631	1 x 03 07 200 / 1 x 70 07 160 / 1 x 98 00 10 / 1 x 98 00 11 / 1 x 98 00 12 / 1 x 98 00 13 / 1 x 98 00 14 / 1 x 98 00 17 / 1 x 98 00 19 / 1 x 98 53 03 / 1 x 98 20 25 / 1 x 98 20 35 / 1 x 98 20 40 / 1 x 98 20 55 / 1 x 98 24 00 / 1 x 98 24 01 / 1 x 98 24 02 / 1 x 98 40 / 1 x 98 47 10 / 1 x 98 47 11 / 1 x 98 47 12 / 1 x 98 47 13 / 1 x 98 47 14 / 1 x 98 47 17 / 1 x 98 47 19 / 1 x 98 52

Article No.	EAN 4003773-	Content
<b>98 99 13</b>	026648	1 x 03 07 200 / 1 x 11 07 160 / 1 x 26 17 200 / 1 x 70 07 160 / 1 x 98 20 65 / 1 x 95 17 200 / 1 x 98 00 10 / 1 x 98 00 13 / 1 x 98 00 14 / 1 x 98 00 17 / 1 x 98 00 19 / 1 x 98 52 / 1 x 98 20 25 / 1 x 98 20 40 / 1 x 98 20 55

Article No.	EAN 4003773-	Content
<b>00 21 15</b>	042853	KNIPEX: 1 x 03 06 180 / 1 x 26 16 200 / 1 x 70 06 160 / 1 x 88 03 180 Wera: 1 x 00 61 00 / 1 x 00 61 15 / 1 x 00 61 52
<b>00 21 15 LE</b>	045175	without tools

Article No.	EAN 4003773-	Content
<b>00 20 12</b>	012412	1 x 03 06 180 / 1 x 26 16 200 / 1 x 70 06 160

Article No.	EAN 4003773-	Content
<b>00 20 13</b>	043287	KNIPEX: 1 x 26 16 200 / 1 x 70 06 160 Wera: 1 x 00 61 10 / 1 x 00 61 20 / 1 x 00 61 54

Article No.	EAN 4003773-	Content
<b>00 20 09 V02</b>	074793	1 x 87 01 180 / 1 x 87 01 250 / 1 x 87 01 300

### Compact Tool Case, 17 parts

> With insulated tools for works on electrical installations



### Standard Tool Case, 26 parts

> With insulated tools for works on electrical installations



### Tool Roll, 15 parts

> With insulated tools for works on electrical installations




### Tool Box, 7 parts for electrical contractors

> Equipped with 4 KNIPEX pliers and 3 WERA Screwdrivers



### VDE-Electro Set

> Pliers VDE-tested in conformance with DIN EN/IEC 60900 1000V, pliers chrome-plated; handles with multi-component grips

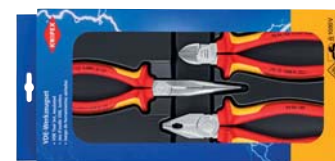

### VDE-Tool Set with 3 WERA screwdrivers

> Tools VDE-tested in conformance to DIN EN/IEC 60900 1000V, pliers chrome-plated; handles with multi-component covers



### Cobra®-Packet

> Pliers grey agramentized, handles with non-slip plastic coating



### **KNIPEX L-BOXX® Electric, 65-part**

Strong box made of impact- and shock-proof ABS plastic. Equipped with 65 brand name quality tools, some VDE-tested according to DIN EN 60900. For mobile use, several boxes can be securely joined together. Flexible inner partitions.

Article No.	EAN 4003773-	Content
<b>00 21 19 LB E</b>	081623	1 x 00 11 01 / 1 x 08 26 145 / 1 x 12 42 195 / 1 x 13 86 200 / 1 x 16 95 01 SB / 1 x 26 26 200 / 1 x 70 06 160 / 1 x 74 06 200 / 1 x 86 03 180 / 1 x 87 01 180 / 1 x 97 53 04 / 1 x 98 52 / 1 x 98 25 01 SL / 1 x 98 20 35 SL
<b>00 21 19 LB</b>	081616	without tools
<b>00 21 19 LB WK</b>	081609	Two-part tool holder



00 21 19 LB E

00 21 19 LB WK

### **Tool Bag "Electric" 23 parts**

> Contains 23 brand name quality tools, partly VDE tested according to DIN EN/IEC 60900

Article No.	EAN 4003773-	Content
<b>00 21 02 EL</b>	081951	1 x 03 06 180 / 1 x 11 06 160 / 1 x 25 06 160 / 1 x 70 06 160 / 1 x 98 52 / 1 x 16 95 01 SB/ 1 x 98 20 25 / 1 x 98 20 35 SL / 1 x 98 20 55 SL / 1 x 98 20 65 SL / 1 x 98 24 01 SL 1 x 98 24 02 SL 1 x 16 20 165



### **Universal Tool Case, 48 parts**

> With insulated tools for works on electrical installations

Article No.	EAN 4003773-	Content
<b>98 99 14</b>	026655	1 x 03 07 200 / 1 x 11 17 160 / 1 x 70 07 160 / 1 x 88 07 250 / 1 x 95 17 200 / 1 x 98 00 10 / 1 x 98 00 13 / 1 x 98 00 14 / 1 x 98 00 17 / 1 x 98 00 19 / 1 x 98 00 22 / 1 x 98 01 10 / 1 x 98 01 13 / 1 x 98 01 14 / 1 x 98 01 17 / 1 x 98 01 19 / 1 x 98 01 22 / 3 x 98 67 05 / 1 x 98 20 25 / 1 x 98 20 40 / 1 x 98 20 55 / 1 x 98 20 65 / 1 x 98 24 01 / 1 x 98 24 02 / 1 x 98 40 / 1 x 98 42 / 1 x 98 45 125 / 1 x 98 45 250 / 1 x 98 47 10 / 1 x 98 47 11 / 1 x 98 47 12 / 1 x 98 47 13 / 1 x 98 47 14 / 1 x 98 47 17 / 1 x 98 47 19 / 1 x 98 47 22 / 1 x 98 47 24 / 1 x 98 52 / 1 x 98 53 03 / 6 x 98 64 02 / 1 x 98 65 40
<b>98 99 14 LE</b>	060703	empty



### Tool Case "Electric", 20 parts

> With 20 brand name tools, partly VDE tested according to DIN EN/IEC 60900; heavy duty ABS material, black

Article No.	EAN 4003773-	Content
00 21 20	052166	1 x 03 06 180 / 1 x 26 16 200 / 1 x 26 26 200 / 1 x 70 06 160 / 1 x 74 06 200 / 1 x 95 16 200 / 1 x 98 52 / 1 x 86 03 180 / 1 x 87 03 250 / 1 x 200 / 1 x 16 80 125 / 1 x 98 20 25 / 1 x 98 20 65 SL / 1 x 98 20 55 SL / 1 x 98 20 40 SL / 1 x 98 24 01 SL / 1 x 98 24 02 SL / 1 x 98 25 01 SL / 1 x 98 25 02 SL / 1 x 005655 Voltage detector



### Tool Case "Electric", 23 parts

> Contains 23 brand name quality tools, partly VDE tested according to DIN EN/IEC 60900; hard-wearing ABS hard-shell construction with aluminium frame and circular buffer protection

Article No.	EAN 4003773-	Content
00 21 30	051084	1 x 00 11 01 / 1 x 03 06 180 / 1 x 200 / 1 x 16 95 01 SB / 1 x 26 16 200 / 1 x 26 26 200 / 1 x 70 06 125 / 1 x 70 06 160 / 1 x 86 03 180 / 1 x 87 03 250 / 1 x 92 27 62 / 1 x 98 20 25 / 1 x 98 20 35 SL / 1 x 98 20 40 SL / 1 x 98 20 55 SL / 1 x 98 20 65 SL / 1 x 98 20 80 / 1 x 98 24 00 / 1 x 98 24 01 SL / 1 x 98 24 02 SL / 1 x 98 25 01 SL / 1 x 98 25 02 SL / 1 x 98 56



### Tool Case "BIG Twin" Electric, 65-part

> Equipped with 65 brand name quality tools, some VDE-tested according to DIN EN 60900

Article No.	EAN 4003773-	Content
00 21 40	081968	1 x 00 11 01 / 1 x 08 26 145 / 1 x 12 42 195 / 1 x 13 86 200 / 1 x 16 95 01 SB / 1 x 26 26 200 / 1 x 70 06 160 / 1 x 74 06 200 / 1 x 86 03 180 / 1 x 87 01 180 / 1 x 97 53 04 / 1 x 98 52 / 1 x 98 25 01 SL / 1 x 98 20 35 SL / 1 x 05003484001 / 1 x 004018 / 1 x 003760 / 1 x 101-0300 / 1 x 361 252 1 1 x 16135 / 1 x 18115
00 21 41	082118	Tool Case "BIG Twin-Move" Electric same content as 00 21 40, with integrated rollers and telescopic handle
00 21 40 T	062981	telescopic handle for 00 21 40 / 00 21 40 LE
00 21 40 LE	057673	without tools
00 21 41 LE	071549	without tools



00 21 41

### Tool Bag "New Classic Basic"

#### Tool Case "Basic"

Article No.	EAN 4003773-	Content
00 21 02 LE	057499	without tools
00 21 05 LE	056904	without tools



00 21 02 LE



00 21 05 LE

- > Push the button for adjustment on the workpiece
- > Fine adjustment for optimum adaptation to different sizes of workpieces and a comfortable handle width
- > Self-locking on pipes and nuts: no slipping on the workpiece and low handforce required
- > Gripping surfaces with special hardened teeth, teeth hardness approx. 61 HRC: high wear resistance and stable gripping



Article No.	EAN 4003773-	Adjustment positions	Ø Inch	Ø mm	mm	mm
87 01 125	069935	13	1	27	27	125
87 01 150	060116	11	1 1/4	32	30	150
87 01 180	022015	18	1 1/2	42	36	180
87 01 250	022022	25	2	50	46	250
87 01 300	034087	30	2 3/4	70	60	300
87 01 400	005636	27	3 1/2	90	95	400
87 01 560	044321	20	4 1/2	115	120	560



Fine adjustment by pushing a button: fast and comfortable.



## Siphon and Connector Pliers

81

For siphons, oil filters, plastic pipes and connectors of up to 80 mm diameter

Fine adjustment for ideal adjustment to diverse diameters

Robust, heavy duty

- > Ideal for tightening and loosening siphon screw connections, plastic pipe fittings and round union nuts
- > For connectors and couplings with screw connection, such as Cannon circular connectors
- > For gentle loosening of hoses on nozzles and filter cartridges
- > 25 adjustment positions, box-joint design
- > Ergonomic handle geometry
- > Chrome vanadium electric steel, forged, oil-hardened

### 81 01 250 / 81 03 250

- > With serrated gripping jaws; up to Ø 80 mm

### 81 11 250 / 81 13 250

- > With exchangeable plastic jaws for sensitive surfaces; up to Ø 75 mm



81 11 250



Article No.	EAN 4003773-		Pliers	Capacity Ø mm	Adjustment positions	mm
81 01 250	078463		black atramentized	25 – 80	25	250
81 03 250	078487		chrome plated	25 – 80	25	250
81 11 250	078470		black atramentized	10 – 75	25	250
81 13 250	078494		chrome plated	10 – 75	25	250
81 19 250	078500		2 pairs of plastic jaws for 81 11 250 and 81 13 250			

Fully open, push, grab!

Additional fast adjustment on the workpiece by sliding the pliers handle

- > Combines the proven, reliable locking of the hinge bolt with an additional push function which makes it easier to work in very confined and inaccessible areas
- > The adjustment directly on the workpiece is possible by simply sliding the pliers handle
- > Reliable locking of the hinge bolt with the first workload. The gripping width of the pliers is then fixed and can only be adjusted by pressing the button
- > To re-activate the sliding function, the hinge bolt must be released by pressing the push button and the pliers must be completely opened again

#### 87 22 250

- > With slim two-colour multi-component sleeves without collar for better handling and easier transport



87 21 300



QuickSet



Article No.	EAN 4003773-	Adjustment positions	Ø Inch	Ø mm	mm	mm
87 21 250	072775	25	2	50	46	250
87 21 300	078524	25	2 3/4	70	60	300
87 22 250	077794	25	2	50	46	250

## Pliers Wrenches

Pliers and a wrench in a single tool


Replaces the need for sets of metric and imperial spanners

Smooth jaws for damage free installation of plated fittings - working directly on chrome!

- > Adjustable tightening tool
- > Also excellent for gripping, holding, pressing and bending workpieces
- > Zero backlash jaw pressure prevents damage to edges of sensitive components
- > Push the button for adjustment on the workpiece
- > Parallel jaws give a more solid grip; its design allows flexible adjustment of all widths up to the specified maximum size
- > Reliable catching of the hinge bolt: no unintentional shifting
- > The ratchet type principle allows quick and easy tightening and release of all bolted connections
- > Lever transmission greater than 10 : 1 for strong gripping power
- > Chrome vanadium electric steel, forged, oil-hardened



86 03 125

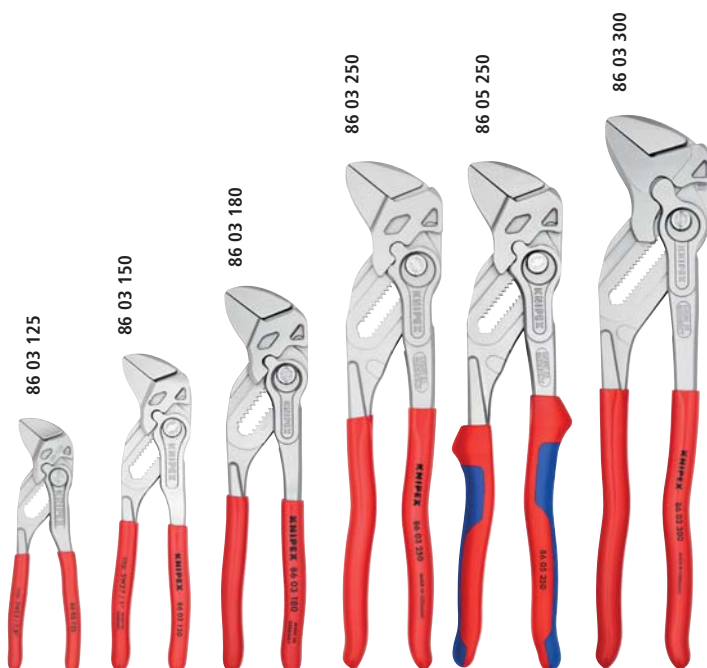

Article No.	EAN 4003773-	Adjustment positions	Hex Inch	Hex mm	mm
86 03 125	077497	11	7/8	23	125
86 03 150	069676	14	1	27	150
86 03 180	035466	13	1 3/8	35	180
86 03 250	033837	17	1 3/4	46	250
86 05 150	069928	14	1	27	150
86 05 180	047162	13	1 3/8	35	180
86 05 250	047841	17	1 3/4	46	250

#### Pliers Wrench XL

86 03 400	077312	25	3 3/8	85	400
-----------	--------	----	-------	----	-----

## Electronic Super Knips®

DIN ISO 9654

78

- > Precision pliers for ultra fine cutting work, e. g. in electronics and fine mechanics
- > Ground, very sharp cutting edges without bevel
- > Shear cut with controlled micro cutting edge misalignment for the most precise cutting of even the thinnest of wires and for a long service life
- > Precision shaped tips cut wires resting on a board from Ø 0.2 mm
- > Joint with stainless steel rivet
- > Extremely smooth movement for minimum operator fatigue
- > With opening spring and opening limiter

### 78 03 125

- > Cutting edge hardness approx. 54 HRC; INOX – stainless steel

### 78 61 125

- > Also suitable for cutting glass fibre cables (fibre optics)
- > Cutting edges additionally induction hardened, cutting edge hardness approx. 64 HRC
- > Special tool steel, oil-hardened in multiple stages

















## Super Knips® XL

### 78 03 140

- > Durable and stainless, made from INOX – stainless steel, cutting edges hardened to 54 HRC

### 78 61 140


- > Heavy duty, made from burnished special tool steel, cutting edges additionally induction hardened to 64 HRC

Article No.	EAN 4003773-		Ø mm	Ø mm	mm
78 03 125	035381	✱    	0.2 - 1.6	1.0	125
78 61 125	035404	✱    	0.2 - 1.6	1.2	125
78 03 140	081647	✱    	0.2 - 2.1	1.2	140
78 61 140	081685	✱    	0.2 - 2.1	1.4	140

available in 140 mm length



78 03 140

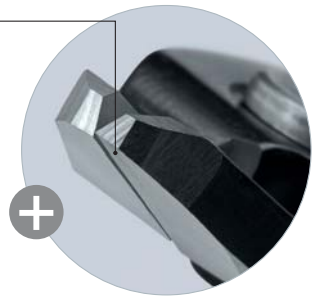

Shear cut with controlled micro cutting edge misalignment for the most precise cutting of even the thinnest of wires and for a long service life



## Precision Electronics Diagonal Cutters

DIN ISO 5654

79

- > Precision pliers for ultra fine cutting work, e. g. in electronics and fine mechanics
- > Very precisely ground and sharp cutting edges with very small bevels for exact cutting on delicate electronic components; also available without bevel for flush cutting
- > Cutting edges additionally induction hardened, cutting edge hardness approx. 64 HRC
- > Approx. 20% lighter than conventional electronics pliers
- > Bolted joint with carefully manufactured joint surfaces for even, low-friction movement throughout the entire opening range
- > Smooth-running double spring for a gentle and even opening
- > Ball bearing chrome steel, forged, multi stage oil-hardened

### 79 02 125

- > Round head

### 79 12 125


- > Specially for cutting through hard wire and piano wire

### 79 42 125








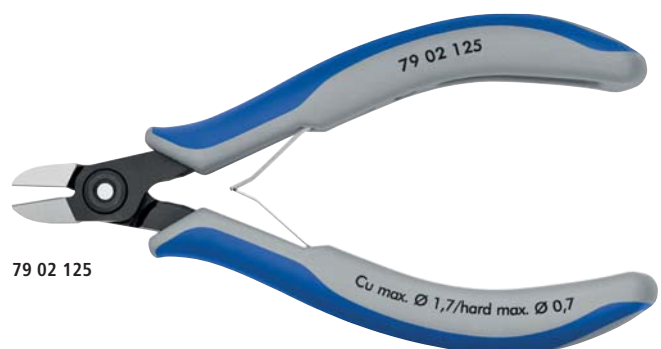








- > Pointed head

### 79 42 125 Z

- > For an optimised flush cutting result of soft materials




79 02 125

Article No.	EAN 4003773-		Ø mm	Ø mm	Ø mm	Ø mm	mm
79 02 125	061403	✱    	0.2 - 1.4	1.0	0.6		120
79 12 125	071365	✱    	0.3 - 1.7	1.3	1.0	0.6	125
79 42 125	061380	✱    	0.1 - 1.5	0.8			125
79 42 125 Z	078449	✱    	0.1 - 1.3				125


# PLIERS ABC – TECHNICAL BASICS

## BASIC SHAPES OF THE JAWS


flat jaws



half-round jaws



round jaws




**Cutting Pliers**  
for cutting or nipping (diagonal, centre and end cutters, carpenters' pincers etc.)




**Gripping Pliers**  
(flat-, long-nose and water pump pliers etc.)


## JOINT CONNECTIONS



**Forged-in joint axle**  
The rivet is part of one handle (forged from one piece)  
> high stability for highest strain  
> long service life



**Joint with inserted rivet**  
A proved, sturdy and precise rivet connection for all standard pliers.



**Bolted joint**  
For particularly demanding requirements in terms of precision and smooth operation, e.g. in circlip pliers and cable shears (even the finest multi-stranded conductors have to be cut cleanly).



**Combined Pliers**  
for cutting and gripping (combination, stork beak and radio pliers etc.)




**Special Pliers**  
for special applications, e.g. notching or punching different types of materials (sheet-metal nibbler, tile nibbling pincers etc.)

## TYPES OF JOINTS

### Lap joint

The two plier halves lie on top of each other but are not milled out.





### Single joint

Half the thickness in each pliers handle is milled away in the joint area so that both handles can be laid into each other.




### Box joint

One handle on the pliers is slit. The other handle is pushed through this slot. This joint connection can withstand a high level of load and strain because the joint bolt is supported on both sides and the inside handle is guided on both sides.

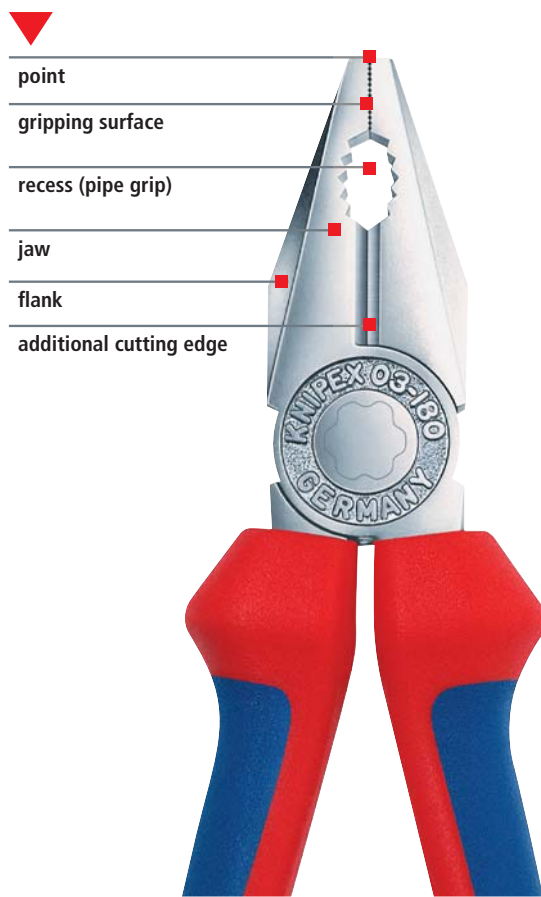


# CUTTING EDGE – TECHNICAL BASICS

## Direction and position of cutting edges

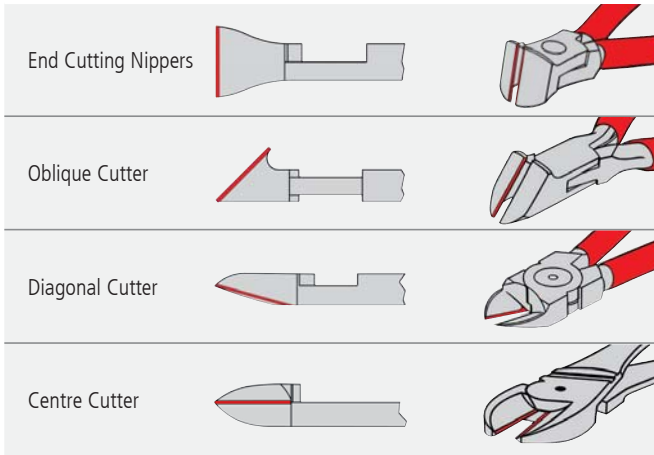

## Cutting edge shapes DIN ISO 5742

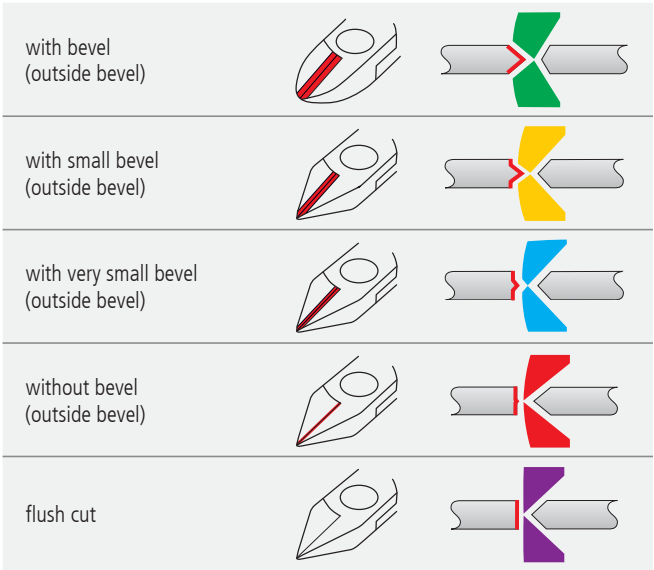

# WIRE CLASSES

	Material examples	Type of wire	Tensile strength	
			N/mm <sup>2</sup>	kp/mm <sup>2</sup>
	Copper, plastics	soft	220	22
	Nail, wire pin	medium-hard	750	75
	Wire rope strand, steel wire	hard	1800	180
	Spring steel wire	piano wire	2300	230

The maximum values indicated always stay for the performance cutting conditions, when the wire is placed as near as possible to the joint.



## Safety instructions

- > Each tool should only be used for its specified purpose.
- > When using cutting pliers: beware of wire ends flying off. Wear protective goggles and – if needed – gloves. Be aware of bystanders.
- > Only handles marked with the symbol are insulated.




## Care Tips

A drop of oil on polished surfaces and in the joint will keep the tool in good working order and will increase the service life of your pliers.

## STRUCTURE OF ARTICLE NUMBER

## HEAD/HANDLES

Basic model e. g. KNIPEX Cobra® Hightech Water Pump Pliers	Form e. g. straight	Finish e. g. head polished, handles with mul- ti-compo- nent grips	Length e. g. 250 mm	Accessory e. g. Tethered- Tools- Programm
<b>87</b>	<b>0</b>	<b>2</b>	<b>250</b>	<b>T</b>

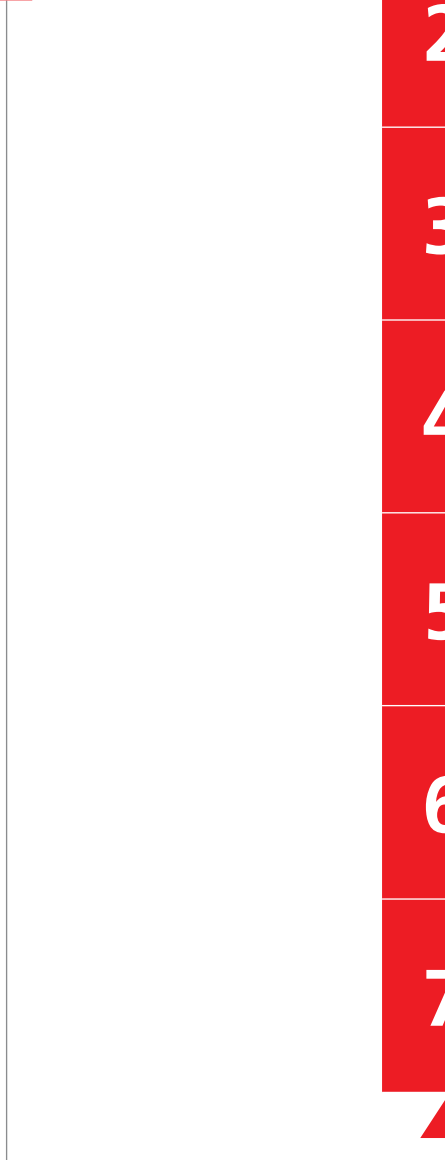

**0**

Pliers black  
atramentized,  
head polished



**1**

Head polished,  
handles plastic coated



**2**

Head polished,  
handles with  
multi-component grips



**3**

Pliers chrome plated,  
handles plastic  
coated



**4**

Pliers chrome plated



**5**

Pliers chrome plated,  
handles with multi-  
component grips



**6**

Pliers chrome plated,  
handles insulated with  
multi-component grips,  
VDE-tested

DIN EN 60900 / IEC 60900



**7**

Pliers chrome plated,  
handles with dipped  
insulation,  
VDE-tested

DIN EN 60900 / IEC 60900



# INDEX

## KNIPEX Tethered Tools

### New Products 2018

KNIPEX TwistCut	
Electricians' shears	
Wire Rope Cutter	
KNIPEX Twistor16	
Automatic Stripping Pliers	
KNIPEX ErgoStrip® L – Universal Stripping Tool	
Range boxes of end sleeves (ferrules)	
F-compression connector	
KNIPEX CoBolt® S	
Pliers Wrench	
Tool Case "Robust 34" Electric	
Tool Case "Robust 45" Electric	
KNIPEX X-Cut®	
Compact Diagonal Cutter	
Diagonal Cutters	
High Leverage Diagonal Cutters	
Magnetic LED Lamp	
Pliers for Electrical Installation	
Electricians' Pliers	
Dismantling Pliers	
KNIPEX StriX	
Insulation Strippers	
Diagonal Insulation Stripper	
Snipe Nose Side Cutting Pliers	
Needle-Nose Combination Pliers	
Combination Pliers	
Long Nose Pliers	
Flat Nose Pliers	
KNIPEX Cobra®	
KNIPEX Alligator®	
Cable Shears	
Cable Shears with twin cutting edge	
Cable Cutters ratchet action	
Cable Cutters (ratchet principle)	
Cable Cutters (ratchet action) – SWA cable	
ACSR Cable Cutter (ratchet action)	
Cable Shears	
Cable Shears (ratchet action)	
Electricians' Shears	
Dismantling Knives	
Cable Knives	
KNIPEX ErgoStrip® – Universal Dismantling Tool	
Dismantling Tools	
Universal Dismantling Tools	
KNIPEX MultiStrip 10	
Automatic Insulation Stripper	

5	Self-Adjusting Insulation Strippers	29
	Automatic Insulation Stripper for flat cable	29
	Wire stripping tool for coax cable	30
7	Stripping Tool for coax cables	30
7	Crimping Pliers	30
8	Dismantling Tool for data cables	30
8	KNIPEX PreciForce®	31
9	Crimping Pliers for Western plugs	31
9	KNIPEX MultiCrimp® – Crimping Pliers with changer magazine	32
10	Crimping Pliers short design	32
10	Self-Adjusting Crimping Pliers for end sleeves (ferrules)	33/34
10	Crimping Pliers for end sleeves (ferrules)	35
10	Crimping Pliers	35
11	Crimp System Pliers for exchangeable crimping dies	36
12	KNIPEX eCrimp	36
	Crimping Dies	37
	Four-Mandrel Crimping Pliers	38
13	Compression Tool	38
14	Insertion tool	38
14	Pipe Cutter	39
14	Vinyl Shears	39
15	Notching Pliers	39
16	Screwdriver Set	40
16	Wire Rope Cutters (forged)	41
17	KNIPEX CoBolt®	41
18	Pen-Style Control Cabinet Key	41
18	Control Cabinet Keys	42
18	KNIPEX TwinKey®	42
19	Crimp Assortments	43/44/45
19	Tool Case for Photovoltaics	45
20	Tool Assortments, Cases and Sets	46/47/48
20	KNIPEX Cobra®	49
20	Siphon and Connector Pliers	49
20	KNIPEX Cobra® QuickSet	50
21	Pliers Wrenches	50
21	Electronic Super Knips®	51
22	Precision Electronics Diagonal Cutters	51
22	Pliers ABC – Technical Basics	52
23	Cutting Edge – Technical Basics	53

It is not permissible to copy the catalogue or parts of it in any way without our approval.

Subject to model modifications and technical changes.  
Illustrations, dimensions and weights are just approximate.

No liability is assumed for misprints or errors.  
Printed in the Federal Republic of Germany.

KNIPEX-Werk C. Gustav Putsch KG


## **KNIPEX-Werk** **C. Gustav Putsch KG**

42337 Wuppertal  
Germany

Tel.: +49 202 47 94-0  
Fax: +49 202 47 74 94

[info@knipex.com](mailto:info@knipex.com)  
[www.knipex.com](http://www.knipex.com)

Follow us on:   



Your dealer